

SH Servers, Stands & Docking System

ITEM#

PROJECT

DATE

Features

Remote Docking Station

- Remote one & two server docking stations for additional satellite coffee serving.
- Soft Heat® servers supply controlled heat to coffee to maintain flavor and temperature.
- LED power indicator shows server is operational.
- Docking stations have instant power contact with servers.
- Safety-Fresh® brew-through lid with vapor seal and spill prevention.
- International electrical configurations available.



1.5 gallon SH Servers on 1SH Stand

(sold separately)

Dimensions: 28.2" H x 10" W x 14" D
(71.6cm H x 25.4cm W x 35.6cm D)



2SH Stand

Dimensions: 11.6" H x 18.7" W x 13.2" D
(29.5cm H x 47.5cm W x 33.5cm D)

For current specification sheets and other information, go to www.bunn.com.

Related Products


One Position Drip Tray

For use with Single/Single SH
Product No. : 26830.0000



Two Position Drip Tray

For use with Dual/Dual SH
Product No. : 27150.0000



Model	Agency Listing
SH Server	UL LISTED NSF
1SH Stand	UL LISTED
2SH Stand	UL LISTED


Dimensions & Specifications

Model	Product #	Volts	Amps	Total Watts	Description	Cubic Measure	Shipping Weight	Cord Attached
1SH Stand	27825.0000	120	.8	90	1 SH Server	1.2 ft ³	13 lbs.	Yes
1SH Stand*	27825.0003	120	.8	90	1 SH Server 4" adj legs	1.2 ft ³	13 lbs.	Yes
2SH Stand	27875.0000	120	1.5	180	2 SH Servers	2.1 ft ³	22 lbs.	Yes
2SH Stand*	27875.0003	120	1.5	180	2 SH Servers	2.1 ft ³	22 lbs.	Yes
SH Server	27850.0001	n/a	n/a	n/a	1.5 Gal	2.4 ft ³	17 lbs.	No
SH Server*	27850.0004	n/a	n/a	n/a	1.5 Gal, 30 min.	2.4 ft ³	18 lbs.	No
SH Server	27850.0006	n/a	n/a	n/a	1.5 Gal, 45 min.	2.4 ft ³	17 lbs.	No
SH Server*	27850.0008	n/a	n/a	n/a	1.5 Gal, 60 min.	2.4 ft ³	17 lbs.	No
SH Server†	27850.0009	n/a	n/a	n/a	1.5 Gal, adj. timer	2.2 ft ³	17 lbs.	No
SH Server	27850.0016	n/a	n/a	n/a	1.5 Gal, 240 min.	2.4 ft ³	17 lbs.	No
SH Server*	27850.0022	n/a	n/a	n/a	1.5 Gal, 120 min.	2.4 ft ³	17 lbs.	No

* Models have black decor.

† Model has auto shut off feature

Electrical: 2-wires plus ground service rated 120V, single phase, 60Hz.

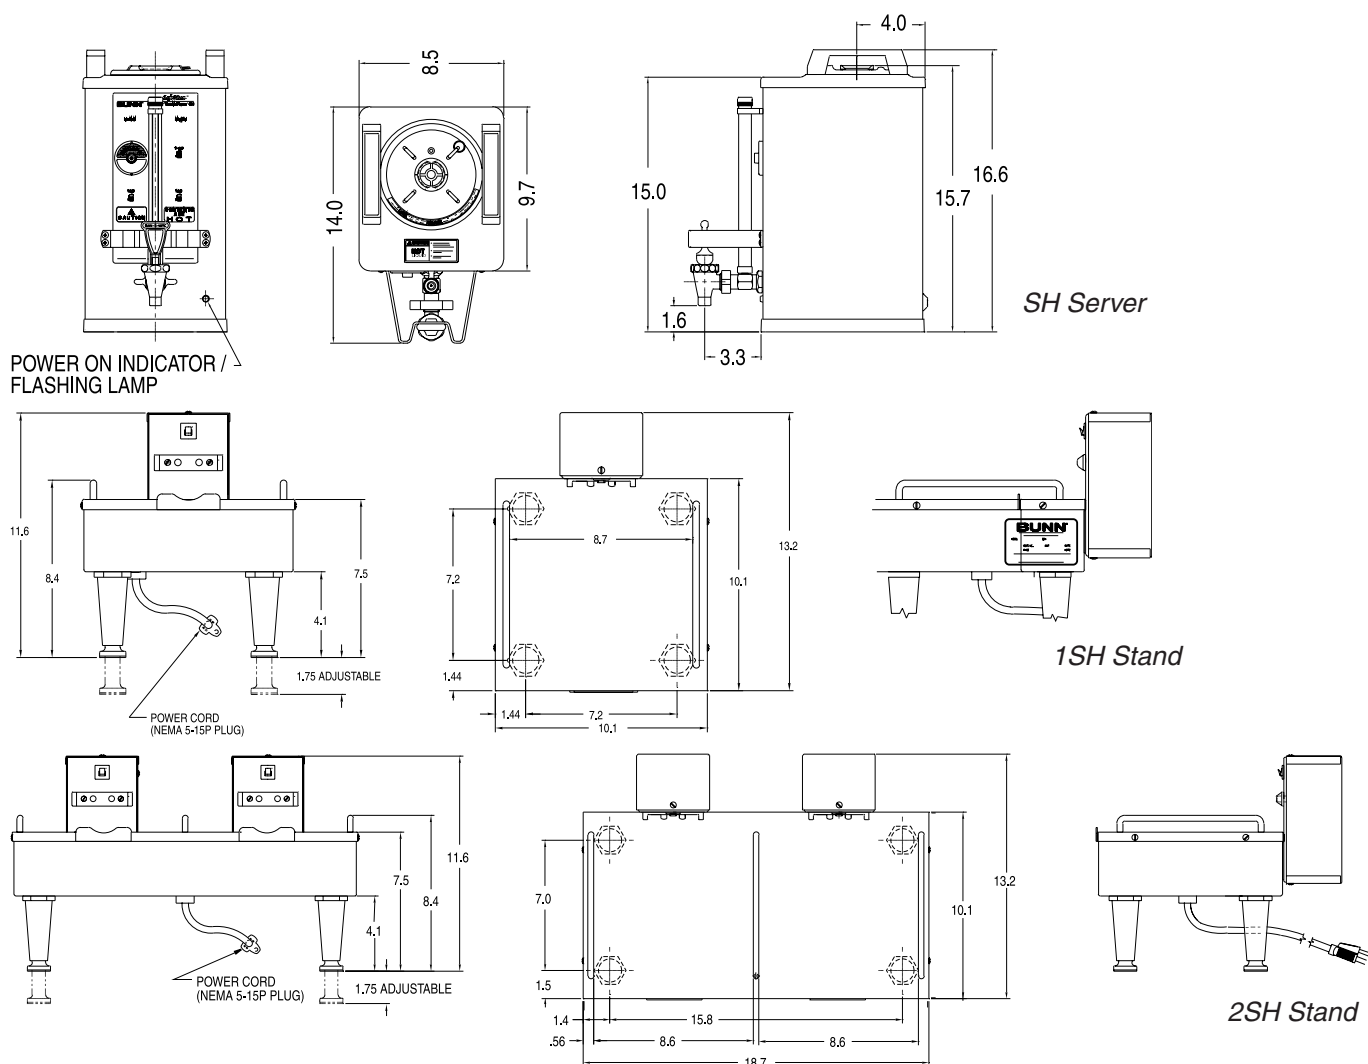

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches.

02/14 © Bunn-O-Matic Corporation