



Equipment That Dominates



FOR SERIOUS
CULINARY
PROFESSIONALS

It all starts with the ingredients.

We understand the importance of having reliable equipment in your operation. Our job is to provide equipment that puts your mind at ease so you can do what you do best, create!



CULITEK

REFRIGERATION

CULITEK, Commercial
Foodservice Equipment
You Can Count On!

Reach-In Refrigeration Buying Guide



EQUIPMENT THAT DOMINATES



430 Stainless Steel
Exterior Construction



Environmentally Friendly R290
Hydrocarbon Refrigerant




Pre-Programmed
Digital Controls



SS Series

HD Series

	SS Series	HD Series
INTERIOR CONSTRUCTION	Corrosion-Resistant 304 Stainless Steel	Corrosion-Resistant 304 Stainless Steel
SHELF INSTALLATION	Adjustable plastic coated steel shelves installed with K-clips	Shelves have preinstalled stainless steel pilasters with clips and epoxy coated wire shelves
SHELF CAPACITY	Up to 90 lbs.	Up to 90 lbs.
TEMPERATURE RANGE	Digital temperature control ranges 33°F to 41°F in refrigerators and -8°F to 0°F in freezers	Digital temperature control ranges 33°F to 40°F in refrigerators and -8°F to 0°F in freezers
SELF-CLOSING DOORS	With stay open feature beyond 90° and recessed handles	With stay open feature beyond 90° and recessed handles
AIR FLOW	Bottom mounted condensing unit. Carel temperature controller initiates automatic defrost cycle for worry-free use	Air flow channeled down the back of the unit for better airflow distribution in the cabinet
AVAILABLE MODELS	1, 2, and 3 Door Refrigerators & Freezers MRRF-1D, MRRF-2D, MRRF-3D, MRZF-1D MRZF-2D, MRZF-3D	1, 2, and 3 Door Refrigerators & Freezers R1SS, R2SS, R3SS, F1SS, F2SS, F3SS





Equipment That Dominates

REFRIGERATION REACH-INS



MRRF-1D



R2SS

CULITEK refrigerators and freezers are built tough with stainless steel interior and exterior. Available in 1, 2, and 3 door models, each unit includes standard features, such as LED interior lighting, digital temperature controller, fully assembled casters, self-closing doors with stay-open feature, and environmentally friendly, R-290 refrigerant. Advanced design, all units are ETL and ETL Sanitation listed.

CULITEK REACH-IN MODELS

SS-SERIES: MRRF-1D, MRRF-2D, MRRF-3D, MRFZ-1D, MRFZ-2D, MRFZ-3D HD SERIES: R1SS, R2SS, R3SS, F1SS, F2SS, F3SS



CULITEK Refrigerator Comparison



Model Number	MRRF-1D	R1SS	MRRF-2D	R2SS	MRRF-3D	R3SS
Doors	1	1	2	2	3	3
Shelves	3	3	6	6	9	9
Capacity	23 cu ft	19.1 cu ft	48 cu ft	43.8 cu ft	72 cu ft	68 cu ft
Horsepower	1/5	1/7	1/4	1/5	3/4	1/4
Overall Dimensions	29"Wx32"Dx82.5"H	27"Wx31"Dx83"H	54"Wx32"Dx82.5"H	54"Wx31"Dx83"H	81"Wx32"Dx82.5"H	81"Wx31"Dx83"H
Refrigerant	R290	R290	R290	R290	R290	R290
Temperature Range	33°F - 41°F	33°F - 41°F	33°F - 41°F	33°F - 41°F	33°F - 41°F	33°F - 41°F

CULITEK Freezer Comparison



Model Number	MRFZ-1D	F1SS	MRFZ-2D	F2SS	MRFZ-3D	F3SS
Doors	1	1	2	2	3	3
Shelves	3	3	6	6	9	9
Capacity	23 cu ft	19.1 cu ft	48 cu ft	44.8 cu ft	72 cu ft	68 cu ft
Horsepower	3/4	1/2	1	3/4	1 1/4	1 1/4
Overall Dimensions	29"Wx32"Dx82.5"H	27"Wx31"Dx83"H	54"Wx32"Dx82.5"H	54"Wx31"Dx83"H	81"Wx32"Dx82.5"H	81"Wx31"Dx83"H
Refrigerant	R290	R290	R290	R290	R290	R290
Temperature Range	-7°F - 0°F	-8°F - 0°F	-7°F - 0°F	-8°F - 0°F	-7°F - 0°F	-8°F - 0°F

CULITEK SS-Series Reach Ins

Models: MRRF-1D, MRRF-2D, MRRF-3D, MRFZ-1D, MRFZ-2D, MRFZ-3D



MRRF-1D

MRFZ-2D

SS-Series Refrigerators and Freezers

It all starts with the ingredients. Reliable refrigeration is the key to keeping your valuable food products at safe temperatures. The CULITEK SS-Series refrigerators and freezers are constructed of heavy-duty, stainless steel. Available in 1, 2, or 3-door models, each unit includes standard features, such as incandescent interior lighting, LED temperature Carel controller, fully-assembled casters, self-closing doors, and environmentally friendly, R-290 refrigerant. All units are ETL listed and ETL Sanitation.

Cooling System

- Environmentally-friendly, R290 hydrocarbon refrigerant is free of ozone-depleting properties
- Top down airflow helps to maintain a temperature range of 33°F to 41°F (refrigerators) and -8°F to 0°F (freezers)
- Bottom mounted cooling unit slides out for easy cleaning and maintenance and allows for storage area on top of the unit
- Rugged built axial evaporator fans run efficiently with low velocity and high volume air flow

Cabinet Construction

- Exterior is constructed of 430 corrosion-resistant stainless steel, including doors
- Interior is constructed of 304 corrosion-resistant stainless steel
- Insulated cabinet with foamed-in-place, high density cell polyurethane insulation

Electrical Control

- Electric LED display provides a digital display of cabinet temperatures, allowing for easy temperature adjustments
- Carel temperature controller initiates automatic defrost cycle for worry-free use
- 7-foot power cord with NEMA 5-15 plug

Door(s)

- Stainless steel exterior and interior
- Positive self-closing doors with micro-switch that shuts the evaporator fans off when the door is open
- Recessed handles are built into the door for easy opening and closing
- Locking door keep items inside secure after hours
- One-door models feature field reversible, stainless steel doors (special hinge required, sold separately)

Shelving

- Adjustable plastic coated steel shelves have a load capacity of 90 lbs. per shelf
- Shelving installed with K-clips

Model Features

- Incandescent interior lighting activated by door switch
- 4" casters come standard, 2 locking wheels and 2 non-locking wheels

EQUIPMENT THAT DOMINATES
For Culinary Professionals

STANDARD FEATURES

- Easy to clean, 430 series stainless steel exterior
- Interior constructed of 304 stainless steel
- Digital temperature control ranges 33°F to 41°F in refrigerators and -8°F to 0°F in freezers
- Epoxy coated, corrosion resistant shelves with 90 lb. capacity per shelf
- Self-closing door, with stay open feature beyond 90°
- Bottom mounted condensing unit positioned for easy maintenance
- Preprogrammed digital control featuring auto-defrost cycle
- Foamed-in-place insulation helps provide strength, while helping to maintain internal temperature
- Eco-friendly, R290 hydrocarbon refrigerant



Attention CA Residents PROP 65 WARNING


This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm.

For more information, go to
www.P65warnings.ca.gov


MADE IN CHINA

CULITEK SS-Series Reach Ins Specifications


Models: MRRF-1D, MRFZ-1D

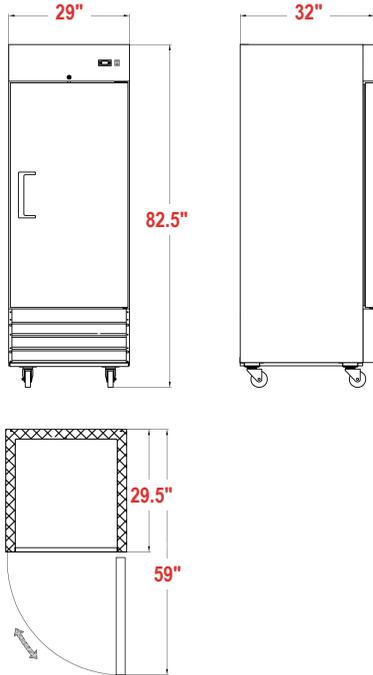

Models: MRRF-2D, MRFZ-2D

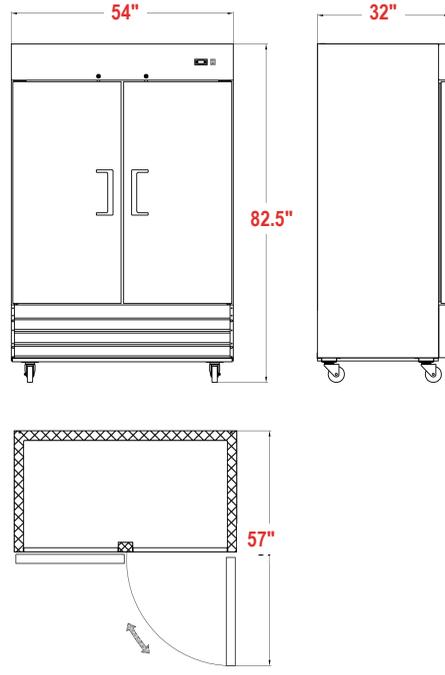

Models: MRRF-3D, MRFZ-3D

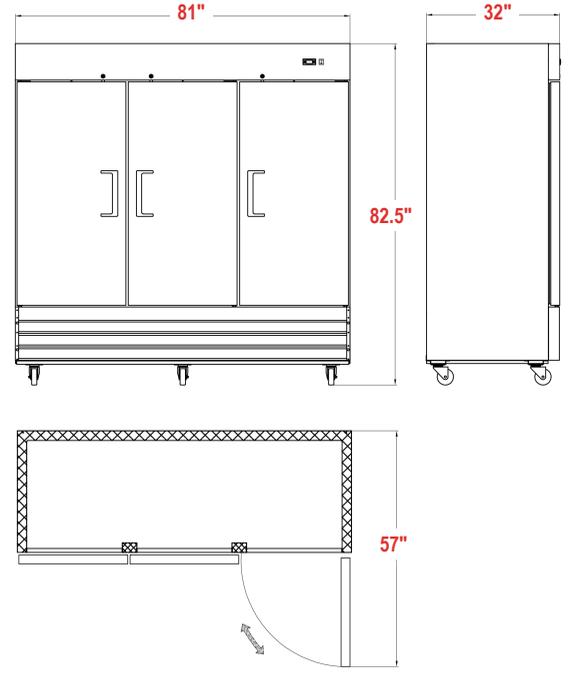

REFRIGERATORS			
Model Number	MRRF-1D	MRRF-2D	MRRF-3D
Doors	1	2	3
Shelves	3	6	9
Net Volume (Cu. Ft.)	23	48	72
Overall Dimensions (in)	29"W x 32"D x 82.5"H	54"W x 32"D x 82.5"H	81"W x 32"D x 82.5"H
Interior Dimensions (in)	24"W x 27"D x 60"H	49"W x 27"D x 60"H	76"W x 27"D x 60"H
Horsepower	1/5	1/4	3/4
Refrigerant	R290	R290	R290
Voltage/Hertz/Phase	115/60/1	115/60/1	115/60/1
Amps	2.6	3.8	9
Net Weight (lbs)	278	445	615
Gross Weight (lbs)	322	512	693
Shipping Dimensions (in)	31"W x 35"D x 83"H	56"W x 35"D x 83"H	84"W x 35"D x 85"H

FREEZERS			
Model Number	MRFZ-1D	MRFZ-2D	MRFZ-3D
Doors	1	2	3
Shelves	3	6	9
Net Volume (Cu. Ft.)	23	48	72
Overall Dimensions (in)	29"W x 32"D x 82.5"H	54"W x 32"D x 82.5"H	81"W x 32"D x 82.5"H
Interior Dimensions (in)	24"W x 27"D x 60"H	49"W x 27"D x 60"H	76"W x 27"D x 60"H
Horsepower	3/4	1	1-1/4
Refrigerant	R290	R290	R290
Voltage/Hertz/Phase	115/60/1	115/60/1	115/60/1
Amps	7.1	10.7	13.2
Net Weight (lbs)	287	474	620
Gross Weight (lbs)	346	525	705
Shipping Dimensions (in)	31"W x 35"D x 83"H	56"W x 35"D x 83"H	84"W x 35"D x 85"H

CULITEK HD-Series Reach Ins

Models: R1SS, R2SS, R3SS, F1SS, F2SS, F3SS

EQUIPMENT THAT DOMINATES
For Culinary Professionals



STANDARD FEATURES

- 304 corrosion resistant stainless steel interior and 430 stainless steel exterior
- Carel digital temperature control ranges 33°F to 40°F in refrigerators and -8°F to 0°F in freezers
- Advanced design R290 Cubigel Compressor® minimizes operating costs and provides higher cooling capacity and increased energy savings
- Pre-installed shelves feature stainless steel pilasters with clips and epoxy coated wire shelves
- Shelves can hold up to 90 lbs
- Self-closing door, with stay open feature beyond 90°
- Eco-friendly R290 hydrocarbon refrigerant
- Packed in a breakaway skid for easy unpacking and set up

HD-Series Refrigerators and Freezers

The CULITEK HD-Series Refrigerators and Freezers have 304 corrosion-resistant stainless steel interior and 430 stainless steel exterior. Available in 1, 2, and 3 door models, each unit includes standard features, such as LED interior lighting, digital temperature controller, pre-installed casters, self-closing doors, and environmentally friendly, R-290 refrigerant. Advanced design, R290 Cubigel Compressors®, minimizes operating costs and provides higher cooling capacity and increased energy savings. Backed by a 2 year warranty on parts and a 5 year warranty on the compressor, all models are EnergyStar® rated [R1SS, R2SS, R3SS, F1SS, F2SS, F3SS], NSF-7 certified, and ETL and ETL Sanitation listed.

Cooling System

- Environmentally-friendly R290 hydrocarbon refrigerant is free of ozone-depleting properties
- Advanced design, R290 Cubigel Compressors® series, minimizes operating costs and provides higher cooling capacity and energy savings
- Top down airflow helps to maintain a temperature range of 33°F to 40°F (refrigerators) and -8°F to 0°F (freezers)

Cabinet Construction

- 304 corrosion resistant stainless steel interior and 430 stainless steel exterior
- Coated coils
- Superior fit and finishing, including smooth edges

Electrical Control

- Carel digital temperature control

Optional — Extra Shelves, includes 4 shelf clips per shelf

Door(s)

- Stainless steel exterior and interior
- Self-closing door, with stay open feature beyond 90°
- Magnetic door gasket(s) standard for positive door seal
- Recessed handles are built into the door for easy opening and closing
- Locking door keep items inside secure after hours

Shelving

- Three pre-installed shelves per section
- Shelves have preinstalled stainless steel pilasters with clips and epoxy coated wire shelves
- Shelves can hold up to 90 lbs



Model Features

- LED interior light(s)
- Pre-installed 4" casters shipped in a breakaway skid for easy unpacking and set up



[R1SS, R2SS, R3SS, F1SS, F2SS, F3SS]




Attention CA Residents
PROP 65 WARNING
This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.P65warnings.ca.gov


MADE IN CHINA

RESIDENTIAL: Culitek assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.


Models: R1SS, F1SS

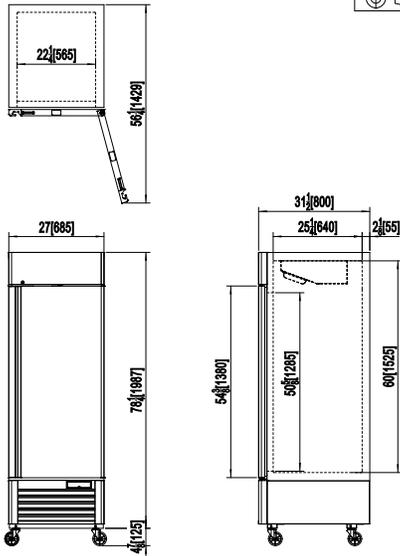

Models: R2SS, F2SS

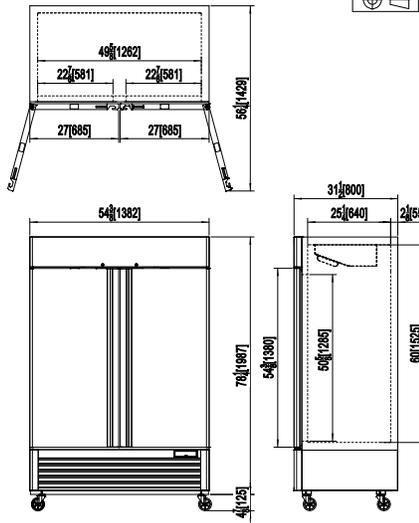

Models: R3SS, F3SS

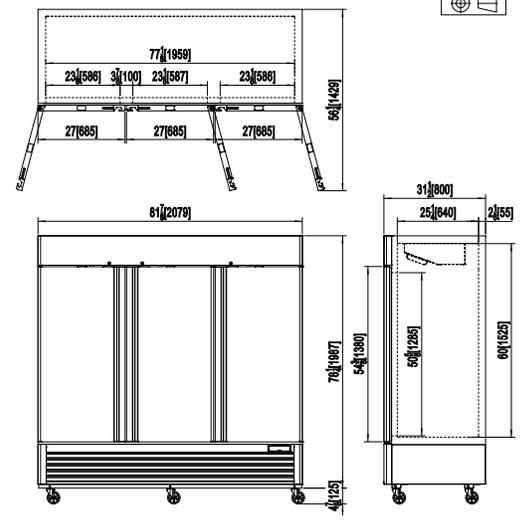

REFRIGERATORS

Model Number	R1SS	R2SS	R3SS
Doors	1	2	3
Shelves	3	6	9
Net Volume (Cu. Ft.)	19.1	43.8	68
Overall Dimensions (in)	27"Wx31 ⁷ / ₁₀ "Dx83 ¹ / ₁₀ "H	54 ² / ₅ "Wx31 ⁷ / ₁₀ "Dx83 ¹ / ₁₀ "H	81 ⁹ / ₁₀ " x 31 ⁷ / ₁₀ "D x 83 ¹ / ₁₀ "H
Interior Dimensions (in)	22 ¹ / ₄ "Wx50 ⁵ / ₈ "H	22 ⁷ / ₈ "W /section, 49 ⁵ / ₈ "W Overall	23 ¹ / ₈ "W /section, 77 ¹ / ₈ "W Overall
Horsepower	1/7	1/5	1/5
Refrigerant	R290	R290	R290
Voltage/Hertz/Phase	115/60/1	115/60/1	115/60/1
Amps	2.1	3.2	4.2
Net Weight (lbs)	249	397	538
Gross Weight (lbs)	282	452	615

FREEZERS

Model Number	F1SS	F2SS	F3SS*
Doors	1	2	3
Shelves	3	6	9
Net Volume (Cu. Ft.)	19.1	44.8	68
Overall Dimensions (in)	27"Wx31 ⁷ / ₁₀ "Dx83 ¹ / ₁₀ "H	54 ² / ₅ "Wx31 ⁷ / ₁₀ "Dx83 ¹ / ₁₀ "H	81 ⁹ / ₁₀ "Wx31 ⁷ / ₁₀ "Dx83 ¹ / ₁₀ "H
Interior Dimensions (in)	22 ¹ / ₄ "Wx50 ⁵ / ₈ "H	22 ⁷ / ₈ "W /section, 9 ⁵ / ₈ "W Overall	23 ¹ / ₈ "W /section, 77 ¹ / ₈ "W Overall
Horsepower	1/2	3/4	1-1/4
Refrigerant	R290	R290	R290
Voltage/Hertz/Phase	115/60/1	115/60/1	115/60/1
Amps	6.3	8.6	5.5
Net Weight (lbs)	265	410	551
Gross Weight (lbs)	298	465	628

* 3 door bottom mount freezer uses a NEMA-L14-20R