

Model:	Item #:	Date:
Project:	Qty:	Approved By:

Royal Series Two Compartment Bar Sink


Royal Series Underbar



KR19-22C Shown

OPTION/	AL ACCESSORIES
KR-402	Faucet Install Kit
21-443L	3/8" E-Z Install Wall Mount Faucet Water
	Line Kit
KR-310	Right End Splash
KR-311	Left End Splash
KR-401	Cap Catcher and Opener
KR-501	Towel Ring
30-160	Perforated Dump Basket
KR-806	Upgrade: 6" Longer Stainless Steel Legs
RS-"XX"	Sound Deadened Single Speedrail ("XX"
	indicates size)
RD-"XX"	Sound Deadened Double Speedrail ("XX"
	indicates size)

STANDARD FEAT	URES		
Sink Bowl	20 gauge stainless steel. 10" x 14" x 10" deep sink bowl. Furnished with 1-1/2" IPS rear corner drain and 7-1/2" overflow pipe		
Drainboard	20 gauge stainless steel reinforced with welded braces every 6"		
Front Apron	20 gauge stainless steel clad over 20 gauge galvanized steel		
Sides	20 gauge stainless steel		
Backsplash	20 gauge stainless steel		
Back and Bottom	20 gauge galvanized steel		
Legs	1-5/8" tubular 16 gauge stainless steel with grey plastic bullet foot		
Plumbing	Hot/Cold Water: 1/2" IPS Drain: 1-1/2" IPS		
Faucet	4" OC wall mount faucet with ceramic cartridge valves		

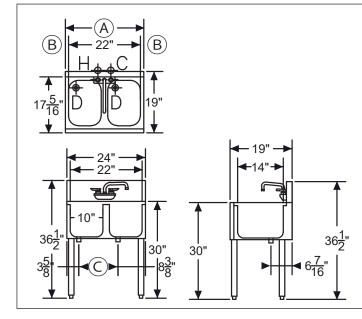

Model Numbers	Overall Length (A)	Drainboard <a>B	Left Side to Drain ©	Bowl Location	Weight (lbs.)
KR19-22C	2'-0"	N/A	4"	Center	60
KR19-32L	3'-0"	12"	4"	Left	80
KR19-32R	3'-0"	12"	15"	Right	80
KR19-42L	4'-0"	24"	4"	Left	105
KR19-42R	4'-0"	24"	27"	Right	105
KR19-42C	4'-0"	12" Each	15"	Center	105

NOTE: Letter at end of Model Number represents Bowl Location
MECHANICAL REQUIREMENTS: 1/2" IPS Hot and Cold water. 1-1/2" IPS drain connec-

NSF.

Conforms to NSF St. 2