



Model: _____ Item #: _____ Date: _____
Project: _____ Qty: _____ Approved By: _____

Royal Series Three Compartment Bar Sinks

Royal Series Underbar



KR19-43L

Product Compliance

- NSF/ANSI 2
- ASME A112.19.3/CSA B45.4




WARNING: Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes.

Specifications

Sink Bowl	20 gauge stainless steel 10" x 14" x 10" deep
	Furnished with 1-1/2" IPS rear corner drain (Model 23-122) and 7-1/2" overflow pipe
Drainboard	20 gauge stainless steel reinforced with welded braces every 6"
	Integrated drainboards (except KR24-73C)
Faucet	4" OC wall or deck mount faucet with 1/4 turn ceramic cartridge valves
	KR19 includes wall mount faucet
	KR24 includes deck mount faucet
Plumbing	Hot/Cold Water: 1/2" IPS
	Drain: 1-1/2" IPS
Legs	1-5/8" tubular 16 gauge stainless steel with grey plastic bullet foot
Front Apron	20 gauge stainless steel clad over 20 gauge galvanized steel
Sides	20 gauge stainless steel
Backsplash	20 gauge stainless steel
Back & Bottom	20 gauge galvanized steel

Model	Depth (Front to Back)	Length (A)	Drainboard Size (B)	Left Side to Drain (C)	Bowls	Bowl Location	Wgt. (lbs.)
KR19-33C	19"	36"	-	4"	3	Center	55
KR19-43L	19"	48"	12"	4"	3	Left	60
KR19-43R	19"	48"	12"	15"	3	Right	60
KR19-53C	19"	60"	(2) 12"	15"	3	Center	69
KR19-63C	19"	72"	(2) 18"	21"	3	Center	75
KR19-73C	19"	84"	(2) 24"	27"	3	Center	86
KR19-83C	19"	96"	(2) 30"	33"	3	Center	94

NOTE: Letter at end of Model Number represents Bowl Location

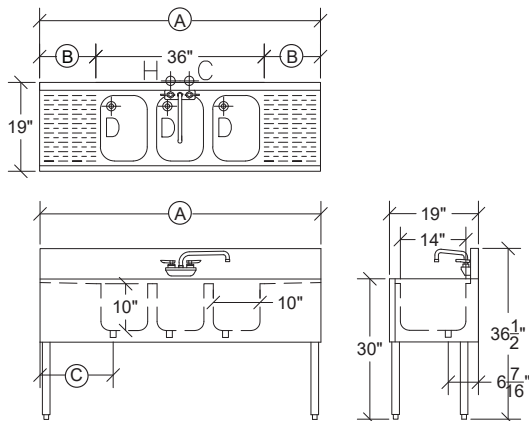

Model	Depth (Front to Back)	Length (A)	Drainboard Size (B)	Left Side to Drain (C)	Bowls	Bowl Location	Wgt. (lbs.)
KR24-33C	24"	36"	-	4"	3	Center	60
KR24-43L	24"	48"	12"	4"	3	Left	65
KR24-43R	24"	48"	12"	15"	3	Right	65
KR24-53C	24"	60"	(2) 12"	15"	3	Center	76
KR24-63C	24"	72"	(2) 18"	21"	3	Center	83
KR24-73C	24"	84"	(2) 24"	27"	3	Center	93

NOTE: Letter at end of Model Number represents Bowl Location

