



| | | | | |
|--------------|-----|----------|--|-------|
| PROJECT NAME | | LOCATION | | AIA # |
| ITEM # | QTY | MODEL # | | SIS # |

SPEC SERIES®

ROLL-IN SOLID SWING DOOR FREEZER

| | | | |
|--------|------------|------------|------------|
| models | STR2FRI-2S | STA2FRI-2S | STG2FRI-2S |
|--------|------------|------------|------------|




| STR2FRI-2S | |
|-----------------|---|
| Exterior | Stainless steel door, front & sides. |
| Interior | Stainless steel side walls, back, floor, door liner, & ceiling. |

| STA2FRI-2S | |
|-----------------|---|
| Exterior | Stainless steel door, front & sides. |
| Interior | Aluminum side walls & back. Stainless steel floor & ceiling. |

| STG2FRI-2S | |
|-----------------|---|
| Exterior | Stainless steel door, with matching aluminum sides. |
| Interior | Aluminum side walls & back. Stainless steel floor & ceiling. |

plan view

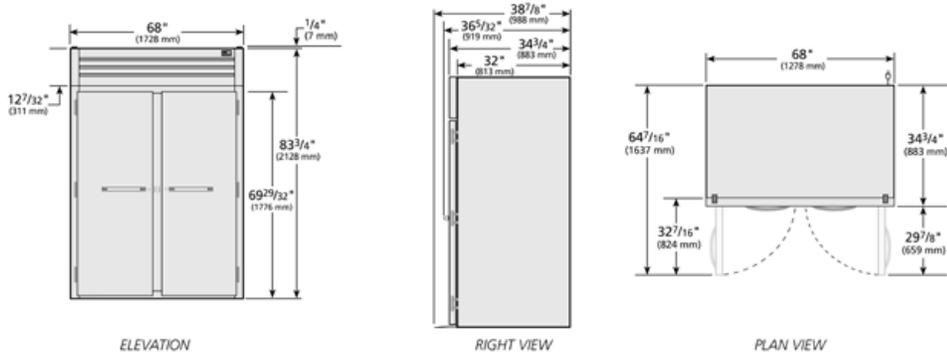

| SPECIFICATIONS | | |
|--|----------------|----------------------|
| Dimensions | in. | mm. |
| Length | 68 | 1728 |
| Depth | 34 3/4 | 883 |
| Height | 83 3/4 | 2128 |
| Electrical | U.S. | International |
| Horsepower | 1 1/2 | N/A |
| Amps | 8.0 | N/A |
| Voltage | 115/208-230/60 | |
| NEMA | 14-20P | |
| Cord Length | 9 ft. | 2.74 M. |
| 115/208-230/1 NEMA-14-20R | | |
| † Depth does not include 4 1/4" (108 mm) for ramp. * Height does not include 1" (26 mm) for system mechanical components. Note: Requires 115/208-230/60Hz, single phase, 3 pole, 4 wire circuit. | | |

Specifications subject to change without notice.
 Chart dimensions are rounded up to the nearest 1/8" (millimeters rounded up to the next whole number).

| | | |
|------|-------------------|---------------------|
| | APPROVALS | AVAILABLE AT |
| 4/17 | Printed in U.S.A. | |



| | | |
|--------------|----------|---------|
| PROJECT NAME | LOCATION | AIA # |
| ITEM # | QTY | MODEL # |
| | | SIS # |

SPEC SERIES®

ROLL-IN SOLID SWING DOOR FREEZER

| | | | |
|--------|------------|------------|------------|
| models | STR2FRI-2S | STA2FRI-2S | STG2FRI-2S |
|--------|------------|------------|------------|



standard features

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly (CFC free) 404A refrigerant.
- Extra large evaporator coil balanced with higher horsepower compressor and large condenser maintains -10°F (-23.3°C) cabinet temperature. Ideal for both frozen foods and ice cream.
- Sealed, cast iron, self-lubricating evaporator fan motors and larger fan blades give True roll-in's a more efficient low velocity, high volume airflow design. This unique design ensures faster temperature recovery and shorter run times in the busiest of foodservice environments.
- Top mounted refrigeration system with evaporator positioned out of food zone to maximize capacity.
- Automatic defrost system time-initiated, temperature-terminated. Saves energy consumption and provides shortest possible defrost cycle.
- Automatic evaporator fan motor delay during defrost cycle.

CABINET CONSTRUCTION

- Insulation - entire cabinet structure and solid door are foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Designed to accept roll-in racks (inboard castors) with maximum dimensions of 27"L x 29"D x 66"H (686 mm x 737 mm x 1677 mm) (supplied by others).
- One (1) heavy gauge stainless steel ramp.

DOORS

- Lifetime guaranteed bolt style door locks standard.
- Lifetime guaranteed heavy duty all metal working door handle.
- Positive seal self-closing door with 120° stay open feature. Lifetime guaranteed external cam lift door hinges, Three (3) per door section.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.

LIGHTING

- Incandescent interior lighting, safety shielded.

MODEL FEATURES

- Exterior digital temperature display, available with either °F or °C .
- Evaporator epoxy coated to eliminate the potential of corrosion
- Backguard improves airflow.
- Interior bumpers protect cabinet walls from abuse caused by roll-in carts.
- NSF/ANSI Standard 7 compliant for open food product.

ELECTRICAL

- Unit completely pre-wired at factory and ready for final connection to a 115/208-230/60Hz single phase, 3 pole, 4 wire, 20 amp dedicated outlet. Cord and plug set included.

OPTIONAL FEATURES/ ACCESSORIES

- (upcharge & lead times may apply)*
- Stainless back. (STR, STA, STG)
 - Field reversible hinge.

WARRANTY*

Three year warranty on all parts and labor and an additional 2 year warranty on compressor. (U.S.A. only)

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

*RESIDENTIAL APPLICATIONS: TRUE assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.



| Model | Elevation | Right | Plan | 3D | Back |
|--------------|-----------|-------|------|----|------|
| ST()2FRI-2S | | | | | |