



TRUE FOOD SERVICE EQUIPMENT, INC. • 2001 East Terra Lane • O'Fallon, Missouri 63366-4434
ph. 636.240.2400 • toll free 800.325.6152 • fax 636.272.2408 • parts fax 636.272.9471 • www.truemfg.com

PROJECT NAME	LOCATION		AIA #
ITEM #	QTY	MODEL #	SIS #


SPEC SERIES®

ROLL-IN SOLID SWING DOOR HEATED CABINET

models	STR2HRI-2S	STA2HRI-2S	STG2HRI-2S
--------	------------	------------	------------



plan view

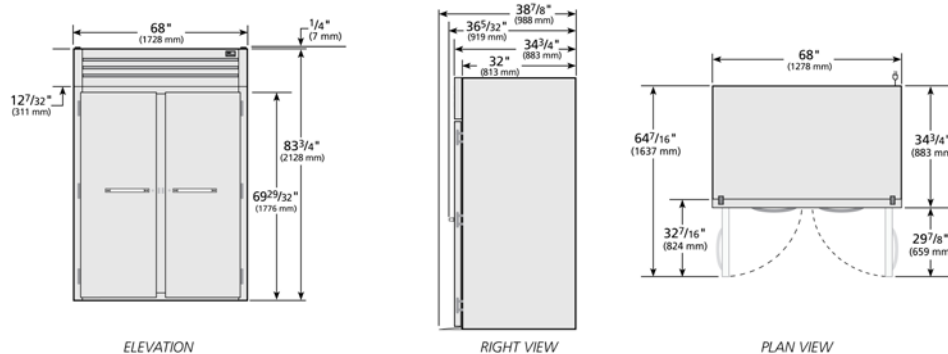

STR2HRI-2S

Exterior	Stainless steel door, front & sides.
Interior	Stainless steel side walls, back, floor, door liner, & ceiling.

STA2HRI-2S

Exterior	Stainless steel door, front & sides.
Interior	Aluminum side walls & back. Stainless steel floor & ceiling.

STG2HRI-2S

Exterior	Stainless steel door, with matching aluminum sides.
Interior	Aluminum side walls & back. Stainless steel floor & ceiling.

SPECIFICATIONS

Dimensions	in.	mm.
Length	68	1728
Depth	34 3/4	883
Height	83 3/4	2128
Electrical	U.S.	International
Watts	4000	
Voltage	115/208-240/60/1	
NEMA	N/A	
Cord Length	N/A	N/A

† Depth does not include 4 1/8" (105 mm) for ramp.
* Height does not include 1" (26 mm) for system mechanical components.
Note: Unit pre-wired at the factory ready to be hard-wired at the install location to a 116/208-240/60 Hz dedicated circuit.

Specifications subject to change without notice.
Chart dimensions are rounded up to the nearest 1/8" (millimeters rounded up to the next whole number).



APPROVALS

AVAILABLE AT



TRUE FOOD SERVICE EQUIPMENT, INC. • 2001 East Terra Lane • O'Fallon, Missouri 63366-4434
ph. 636.240.2400 • toll free 800.325.6152 • fax 636.272.2408 • parts fax 636.272.9471 • www.truemfg.com

PROJECT NAME	LOCATION		AIA #
ITEM #	QTY	MODEL #	SIS #

SPEC SERIES®

ROLL-IN SOLID SWING DOOR HEATED CABINET

models	STR2HRI-2S	STA2HRI-2S	STG2HRI-2S
--------	------------	------------	------------



standard features

HEATER SYSTEM

- Cabinet designed to provide holding temperatures of 140°F to 180°F (60°C to 82.2°C). Heating system controlled by exterior on/off switch and electronic temperature control.
- Two (2) stainless steel (for corrosion resistance), finned tube heating elements per section (1000 watts each) for uniform generation of electric heat. Cabinet comes with a total of 4000 watts.
- Equipped with low-velocity fans to assure even temperature distribution throughout the cabinet. Fans are controlled by exterior on/off switch.
- Manually controlled vent located on top of the cabinet for positive humidity control.

CABINET CONSTRUCTION

- Stainless steel breaker caps.
- Insulation - entire cabinet structure and solid door are foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- One (1) heavy gauge stainless steel ramp per door.

- Designed to accept roll-in racks (inboard castors) with a maximum dimension of 27"L x 29"D x 66"H (686 mm x 737 mm x 1677 mm).

DOORS

- Lifetime guaranteed bolt style door locks standard.
- Lifetime guaranteed heavy duty all metal working door handle.
- Positive seal self-closing doors with 120° stay open feature. Lifetime guaranteed external cam lift door hinges, Three (3) per door section.
- Magnetic door gaskets of one piece construction, removable without tools for ease of cleaning.

LIGHTING

- Incandescent interior lighting; lights activated by exterior on/off switch, safety shielded.

MODEL FEATURES

- Exterior, color coded, temperature display; accurate direct reading of internal cabinet temperature.
- Designed to hold warm baked or cooked food. Cabinet is not designed to heat ambient or cold product.

- Interior bumpers protect cabinet walls from abuse caused by roll-in carts.
- 12" x 20" (305 mm x 508 mm) pan for water included, if additional humidity is required.
- NSF/ANSI Standard 4 compliant for open food product.

ELECTRICAL

- True requires that a sole use circuit be dedicated for the unit.
- Unit pre-wired at the factory ready to be hard-wired at the install location to a 115/208-240/60 Hz dedicated circuit.

OPTIONAL FEATURES/ ACCESSORIES

(upcharge & lead times may apply)

- Field reversible hinge
- Stainless back. (STR, STA, STG)
- Security package.

WARRANTY*

Three year warranty on all parts and labor.
(U.S.A. only)

*RESIDENTIAL APPLICATIONS: TRUE assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

METRIC DIMENSIONS ROUNDED UP TO THE
NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE
WITHOUT NOTICE



Model	Elevation	Right	Plan	3D	Back
ST()2HRI-2S					