




ALUMINUM

PAN RACKS

Knock Down

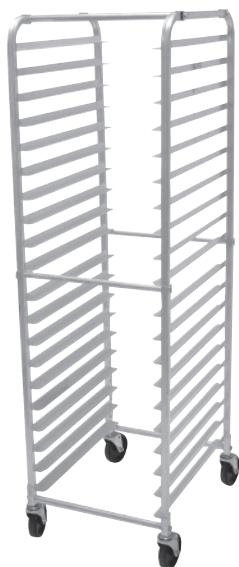

Front Load



Side Load

Item #: _____ Qty #: _____
 Model #: _____
 Project #: _____

FEATURES:

Six cylindrical support bars provide strength and durability.

Plastic endcaps, 1 1/2" ribbed angles, heavy duty 5" stem bolted swivel casters.

Front load pan rack holds 18" x 26" pans or 18" x 13" pans.
 Side load pan rack holds 18" x 26" pans.

500 lb. capacity.

Units shipped K.D.

CONSTRUCTION:

Fully welded 1" square tubing ladder assembly.

Angles are 1" x 1 1/2" x 20" on front load pan rack and 1" x 1 1/2" x 17 3/4" on side load pan rack.

MATERIAL:

6063-T52 extruded aluminum angles, upright tubing, and support pieces.

Model #	Description	Pan Capacity	Shelf Spacing (A)	Overall Size L x W x H	Approx. Weight
PR10-3K	Front Load	10 Full Size or 20 Half Size	3"	20 1/4" x 26" x 38 1/4"	14 lbs.
PR12-5K	Front Load	12 Full Size or 24 Half Size	5"	20 1/4" x 26" x 69 1/4"	24 lbs.
PR18-3K	Front Load	18 Full Size or 36 Half Size	3"	20 1/4" x 26" x 63 1/4"	31 lbs.
PR20-3K	Front Load	20 Full Size or 40 Half Size	3"	20 1/4" x 26" x 69 1/4"	33 lbs.
PR30-2K	Front Load	30 Full Size or 60 Half Size	2"	20 1/4" x 26" x 69 1/4"	39 lbs.
PR18-3KS	Side Load	18 Full Size	3"	28 1/4" x 18" x 63 1/4"	31 lbs.
PR20-3KS	Side Load	20 Full Size	3"	28 1/4" x 18" x 69 1/4"	27 lbs.



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Quotes:

Email: smartfab@advancetabco.com or Fax: 631-586-2933

DIMENSIONS and SPECIFICATIONS

TOL $\pm .500"$

ALL DIMENSIONS ARE TYPICAL

