



**"WE MAKE THE KITCHEN BETTER!"**

Toll Free: 855-855-0399 Email: [info@atosausa.com](mailto:info@atosausa.com)  
[www.atosa.com](http://www.atosa.com) | [www.atosausa.com](http://www.atosausa.com)  
California, Colorado, Florida, Georgia, Illinois,  
New Jersey, Ohio, Texas, Washington

# Bottom Mount Reach-In Freezers

## Standard Features

- Bottom mount compressor units with environmentally friendly R290 refrigerant
- Stainless steel exterior & interior
- Electronic temperature controller
- Maintains temperatures between -8°F – 0°F
- LED interior light(s)
- Recessed door handle(s)
- Door lock(s) standard
- Magnetic door gasket(s) standard for positive door seal
- Pre-installed casters
- Three(3) pre-installed shelves per section
- Down duct refrigeration to ensure even distribution of air

## Optional Accessories

- Extra shelves – includes 4 shelf clips per shelf  
MBF8501GR shelf part #: W0402393  
MBF8503GR shelf part #: W0402387  
MBF8504GR shelf part #: W0402387 left/right shelf,  
part #: W0402388 middle shelf



MBF8503GR

For the best results of food preservation we recommend setting your freezer between -8 °F to 0 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



2 YEAR PARTS AND LABOR WARRANTY (US ONLY)  
5 YEAR COMPRESSOR PART WARRANTY (US ONLY)

## MODELS:

MBF8501GR / MBF8501GRL / MBF8502GR /  
MBF8503GR / MBF8504GR



MBF8501GR



MBF8502GR



MBF8503GR



MBF8504GR



\*For confirmation and updates on the latest energy star models, please visit [energystar.gov](http://energystar.gov)\*



**"WE MAKE THE KITCHEN BETTER!"**

Toll Free: 855-855-0399 Email: [info@atosausa.com](mailto:info@atosausa.com)

[www.atosa.com](http://www.atosa.com) | [www.atosausa.com](http://www.atosausa.com)



California, Colorado, Florida, Georgia, Illinois,  
New Jersey, Ohio, Texas, Washington

## SPECIFICATIONS


| Models    | Door | Capacity (Cu.Ft.) | Shelves | Casters (inch) | Amps (A) | Voltage (V/Hz/Ph) | HP  | Refrigerant | Exterior Dimensions (inch)                                 | Net Weight (lbs) | Gross Weight (lbs) |
|-----------|------|-------------------|---------|----------------|----------|-------------------|-----|-------------|------------------------------------------------------------|------------------|--------------------|
| MBF8501GR | 1    | 19.1              | 3       | 4              | 6.3      | 115/60/1          | 1/2 | R290        | 27×31 <sup>7/10</sup> ×83 <sup>1/10</sup>                  | 265              | 298                |
| MBF8502GR | 2    | 28.5              | 6       | 4              | 8.6      | 115/60/1          | 3/4 | R290        | 39 <sup>1/2</sup> ×31 <sup>7/10</sup> ×83 <sup>1/10</sup>  | 330              | 379                |
| MBF8503GR | 2    | 44.8              | 6       | 4              | 8.6      | 115/60/1          | 3/4 | R290        | 54 <sup>2/5</sup> ×31 <sup>7/10</sup> ×83 <sup>1/10</sup>  | 410              | 465                |
| MBF8504GR | 3    | 68                | 9       | 4              | 6.2      | 208-230/115/60/1  | 1   | R290        | 81 <sup>9/10</sup> ×31 <sup>7/10</sup> ×83 <sup>1/10</sup> | 551              | 628                |

## PLAN VIEW


**MBF8501GR**






**MBF8502GR**



**MBF8503GR**



**MBF8504GR**

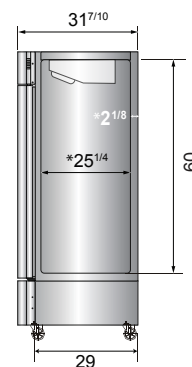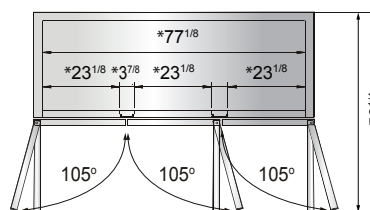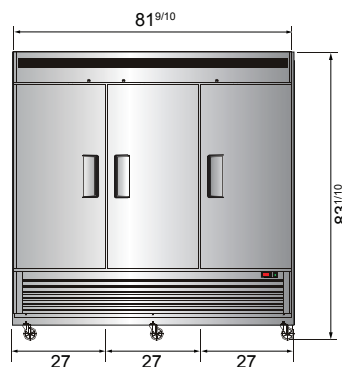

\*Interior Dimensions

SELF-CLOSING  
AND STAY OPEN  
DOOR FEATURE

Casters

Epoxy shelves

Door lock

Down duct

Temperature control

MBF8504GR

MBF8501GR  
MBF8503GR

