


- Double Ball Bearing Raceway for Long Wear and Added Strength
- Zinc Plated
- Raceway Dust Cover
- Thread Covered Not On Solid Wheels. (i.e. Polyolefin, Hard Rubber & Phenolic Wheels)

**APPLICATIONS**

- Work Tables
- Bakery Equipment
- Food Service Operations
- Displays
- Maintenance Carts
- Office Equipment

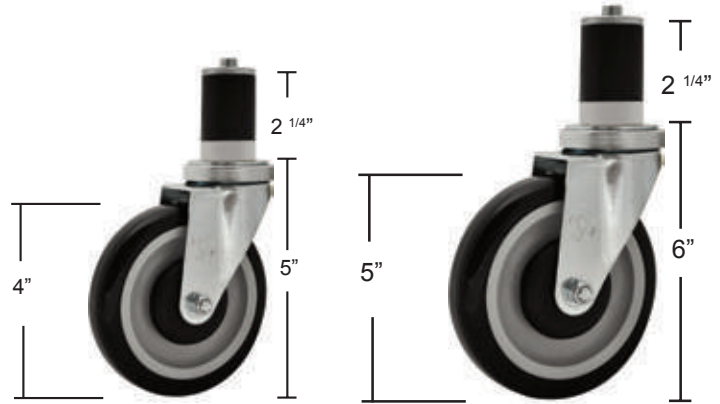

**1-5/8" Stem Work Table Caster**

- Fits Standard 1-5/8" Tubing
- 4" or 5" Polyurethane Wheel Resistant to Acids & Caustics
- Temperature Range -45° to 180°F
- Top Lock Brake
- 300# Weight Cap. per Caster
- Caster Kit of (4 or 6) in POP Box



Part #	Description
5SBR-RA-PLY-PS4	(4) 5" Polyurethane Wheel w/ Top Lock Brake
5SBR-RA-PLY-PS6	(6) 5" Polyurethane Wheel w/ Top Lock Brake
5SBR-RA-PLY	5" Polyurethane Wheel
5SBR-RA-PLY-TLB	5" Polyurethane Wheel w/ Top Lock Brake
4SBR-RA-PLY	4" Polyurethane Wheel
4SBR-RA-PLY-TLB	4" Polyurethane Wheel w/ Top Lock Brake

**1-5/8" Stem Work Table Caster**

- Fits Standard 1-5/8" Tubing
- 5" Polyolefin Wheel Resistant to Chemicals & Solvents
- Temperature Range -45° to 180°F
- Top Lock Brake
- 300# Weight Cap. per Caster
- Caster Kit of (4 or 6)



Part #	Description
5SBR-RA-LDP-PS4	(4) 5" Polyolefin Wheel w/ Top Lock Brake
5SBR-RA-LDP-PS6	(6) 5" Polyolefin Wheel w/ Top Lock Brake
5SBR-RA-LDP	5" Polyolefin Wheel
5SBR-RA-LDP-TLB	5" Polyolefin Wheel w/ Top Lock Brake



**Hard Rubber Wheel**

- Temperature Range -40° to 160°F



**Gray Rubber Wheel**

- Resistant to Oil, Grease, Water & Most Solvents
- Temperature Range -45° to 180°F



**Phenolic Wheel**

- Resistant to Oil & Grease
- Temperature Range -50° to 250°F

Part #	NSF	Description	Weight Capacity
5SBR-RA-HR	✓	5" Hard Rubber Wheel Caster	300#
5SBR-RA-HR-TLB	✓	5" Hard Rubber Wheel Caster w/ Top Lock Brake	300#
5SBR-RA-GR	✓	5" Gray Rubber Wheel Caster	250#
5SBR-RA-GR-TLB	✓	5" Gray Rubber Wheel Caster w/ Top Lock Brake	250#
5SBR-RA-PH	✓	5" Phenolic Wheel Caster	350#
5SBR-RA-PH-TLB	✓	5" Phenolic Wheel Caster w/ Top Lock Brake	350#