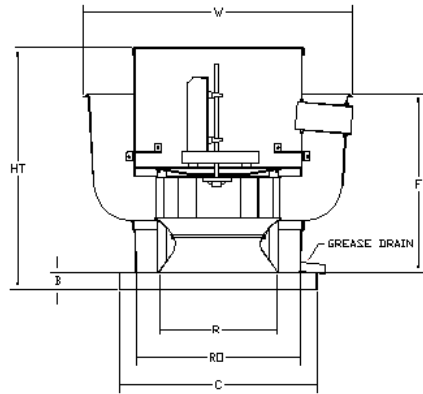


NCAFA SERIES UPBLAST EXHAUST FANS (UL705)

NCAFA BELT DRIVE
CENTRIFUGAL UP-BLAST EXHAUST FANS DIMENSIONAL DATA

FAN MODEL	HT	W	B	C	F	R	RO	WEIGHT LB
NCA08FA	25 1/4	27 1/4	2	21	18 1/2	12 1/8	16	105
NCA10FA	27 1/4	30 1/4	2	21	21 1/2	13 1/4	16	120
NCA14FA	30 1/2	33 3/4	2	24 3/4	23	14 7/8	20	140
NCA16FA	33 3/4	39 3/8	2	28	22 5/8	16 1/2	24	190
NCA18FA	33 3/8	38 7/8	2	28	29 1/2	18	24	195
NCA24FA	37 1/2	43 3/8	2	33	30 5/8	23 7/8	28	270
NCA30FA	40	52 3/4	2	40	33 1/2	24	36	410
NCA36FA	45 9/16	63 7/16	2	44	43 7/16	25 1/4	40	470


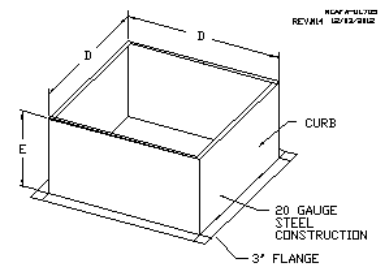


FEATURES:

- ROOF MOUNTED FANS
- UL705
- AMCA SOUND AND AIR CERTIFIED
- INTERNAL WIRING
- WEATHERPROOF DISCONNECT
- THERMAL OVERLOAD PROTECTION (SINGLE PHASE)

OPTIONS:

- BACKDRAFT DAMPER
- HINGED FAN
- PITCHED CURB
- INSULATED CURB
- BIRD SCREEN

BACKDRAFT DAMPER INSTALLATION

PITCHED CURBS ARE AVAILABLE
FOR PITCHED ROOFS.SPECIFY PITCH:
EXAMPLE: 7/12 PITCH = 30° SLOPE

CURB DIMENSIONAL DATA

FAN MODEL	D	E
NCA08FA	19 1/2	12
NCA10FA	19 1/2	12
NCA14FA	23	12
NCA16FA	26 1/2	12
NCA18FA	26 1/2	12
NCA24FA	31 1/2	12
NCA30FA	38 1/2	12
NCA36FA	42 1/2	12