

Bi-metal Insertion Thermometers

The Cooper-Atkins' Bi-metal Pocket Test thermometer has an external dimple on the stem to indicate its minimum insertion point. We do not recommend using bi-metal thermometers for thin, delicate foods such as hamburger patties, seafood, and pork chops. The bi-metal pocket tests have a magnifying lens for improved reading and a pocket sheath with adjustment wrench, made with anti-microbial plastic. Our 1246-02 dials have a blue indicator mark at 32° (freezing point) for ease of adjustment, and a HACCP danger zone highlighted in red.

	1246-01	1246-02	1246-03
	1246-01C	1246-02C	1246-03C
Temperature	-40° to 180°F	0° to 220°F	50° to 550°F
Range:	(-40° to 80°C)	(-20° to 100°C)	(10° to 285°C)
Accuracy:	±2°F	±2°F	±5°F
	(±1°C)	(±1°C)	(±3°C)
Housing	Stainless	Stainless	Stainless
Material:	Steel	Steel	Steel
Dial Diameter:	1" (25 mm)	1" (25 mm)	1" (25 mm)
Stem	.140"	.140"	.140"
Diameter:	(3.5 mm)	(3.5 mm)	(3.5 mm)
Stem Length:	5" (127 mm)	5" (127 mm)	5" (127 mm)
Lens Material:	Magnifying	Magnifying	Magnifying
	Polycarbonate	Polycarbonate	Polycarbonate
Anti-microbial Plastic:	Yes	Yes	Yes
	Sheath Only	Sheath Only	Sheath Only
Weight:	.5 oz (14 g)	.5 oz (14 g)	.5 oz (14 g)
Regulatory Listings:	œ.	88.	100
Warranty:	1 Year	1 Year	1 Year



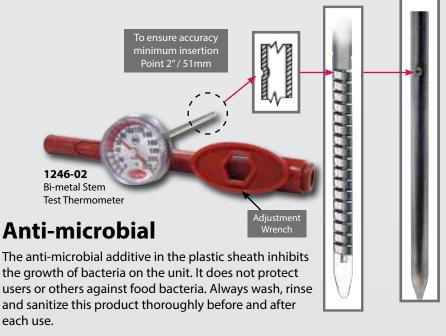

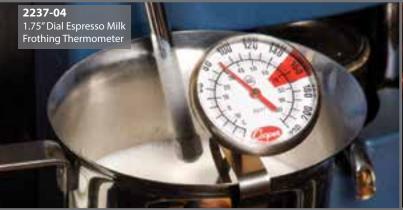

	322-01	1236-70	2237-04 / 04C
Temperature Range:	200° to 400°F (90° to 200°C)	0° to 220°F	0° to 220°F (-10° to 104°C)
Accuracy:	±5°F	±2°F	±2°F (±1°C)
Housing Material:	Stainless Steel	Stainless Steel	Stainless Steel
Dial Diameter:	2.5" (64 mm)	1" (25 mm)	1.75" (178 mm)
Stem Diameter:	.190" (4.8 mm)	.140" (3.6 mm)	.15" (3.8 mm)
Stem Length:	6" (152.4 mm) w/ vessel clip	5" (127 mm)	7" (178 mm) w/ vessel clip
Lens Material:	Glass	Magnifying Polycarbonate	Magnifying Polycarbonate
Weight:	2 oz (57 g)	.5 oz (14 g)	1 oz (28 g)
Regulatory Listings:	<u>@</u>	®	
Warranty:	1 Year	1 Year	1 Year

