


# Refrigerator/Freezer Thermometers

|                             | 2560  | 25HP-01                                    | 330  | 335-01   | 535-01                       | PM180  |
|-----------------------------|---|--|--|--|------------------------------|--|
| <b>Temperature Range:</b>   | -22° to 122°F (-30° to 50°C)                  | -20° to 80°F (-29° to 27°C)                | -40° to 120°F (-40° to 50°C)                     | -40° to 80°F (-40° to 25°C)                      | -20° to 120°F (-30° to 50°C) | -25° to 180°F (-32° to 82°C)                 |
| <b>Accuracy:</b>            | ±1°F (0.5°C)                                  | ±2°F (±1°C)                                | ±2°F (±1°C)                                      | ±2°F (±1°C)                                      | ±5°F (±2°C)                  | ±2°F (±1°C)                                  |
| <b>Housing Material:</b>    | Antimicrobial Plastic                         | Stainless Steel                            | Food Grade Plastic                               | Stainless Steel                                  | Plastic                      | Plastic                                      |
| <b>Dimensions:</b>          | 3.562" x 1.25" x 3.5" (90 mm x 32 mm x 89 mm) | 2.375" x 1.5" x 3" (60 mm x 38 mm x 76 mm) | 0.625" x 0.25" x 4.25" (16 mm x 6.4 mm x 108 mm) | 4.75" x 0.875" x 1.125" (121 mm x 22 mm x 29 mm) | 2" (51 mm)                   | 5" x 3.75" x 0.875" (127 mm x 95 mm x 22 mm) |
| <b>Lens Material:</b>       | Food Grade Polycarbonate                      | Glass                                      | -  | Food Grade Polycarbonate                         | Plastic                      | -  |
| <b>Weight:</b>              | 1.5 oz (43 g)                                 | 1.5 oz (43 g)                              | 0.25 oz (7 g)                                    | 1 oz (28 g)                                      | 0.5 oz (14 g)                | 5 oz (142 g)                                 |
| <b>Regulatory Listings:</b> | CE NSF RoHS                                   | NSF  | NSF  | NSF  | -                            | CE RoHS                                      |
| <b>Warranty:</b>            | Lifetime                                      | 1 Year                                     | 1 Year   | 1 Year   | 1 Year                       | 1 Year                                       |



The 2560 is a low temperature digital thermometer designed to hang or stand within the food zone inside cold storage cabinets. Cable-ties included for added mounting security.

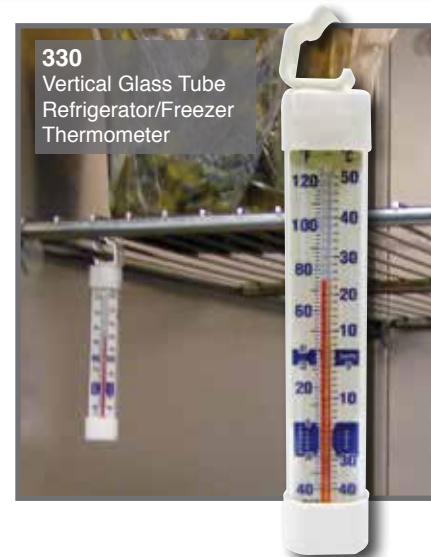

**PM180**  
Dual-Cool™ Panel Thermometer

The Dual-Cool is Cooper-Atkins' first dual-temperature panel thermometer with interchangeable probes, Min/Max alarm settings and Hi/Lo temperature recall. Equipped with user-adjustable settings, it can simultaneously measure temperatures within two separate storage environments or two locations inside of the same reach-in, walk-in or hot-holding cabinet.

- PM180-01**
- PM180 Panel Thermometer
  - 2013 Air Probe
  - 2113 Solid Simulator Probe

- PM180-02**
- PM180 Panel Thermometer
  - (2) 2013 Air Probes

- PM180-03**
- PM180 Panel Thermometer
  - (2) 2113 Solid Simulator Probes

