

24" DEEP BACK BAR COOLERS

EBB – Series • EBB48-24 • EBB59-24 • EBB69-24 • EBB90-24



▲ EBB48-24



▲ EBB59-24



▲ EBB69-24



▲ EBB90-24

Cabinet Construction

Heavy duty stainless steel countertop, with textured and laminated black vinyl exterior. Galvanized steel interior wall, and high quality stainless steel floor. 1 3/4" thick high density foamed-in-place polyurethane insulation. Built-in caster thread receptacles for all units.

Refrigeration System

- Side mounted condensing unit
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with oversized evaporator fan motors provide balanced airflow throughout cabinet to ensure faster temperature drop
- Removable side panel and slide-out condensing unit for convenient repair and maintenance
- Environmentally friendly CFC free R-134A refrigerant
- Air defrost controlled by electrical timer
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan assembly heated by high side copper tube
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

Lighting

- Shielded vertical LED interior lighting with on/off switch for energy efficiency, minimal heat generation and enhanced illumination

Doors

- Textured and laminated black exterior with galvanized steel interior
- 1 3/4" thick high density foamed-in-place polyurethane insulation
- One piece snap-in magnetic door gaskets for easy replacement
- Heavy duty recessed door handles for a flat surface
- Door locks

Shelving

- Two epoxy coated wire shelves per section
- Stainless steel pilasters and shelf clips

Temperature Control





- Factory preset temperature, 35°F
- Temperature setting range from 32°F to 42°F
- Easy to set analog thermostat

Option

- 2 1/2" and 4" diameter casters (3 1/2" and 5" overall height)









Dimensions

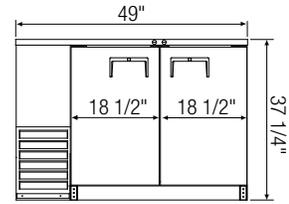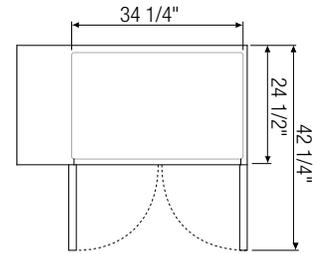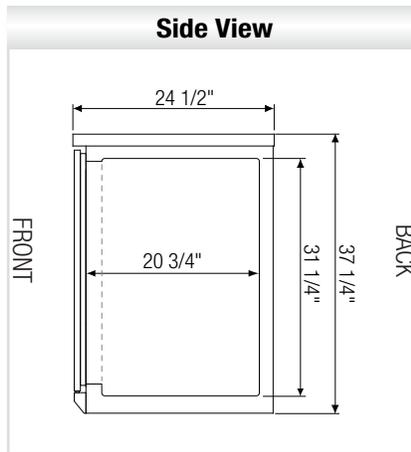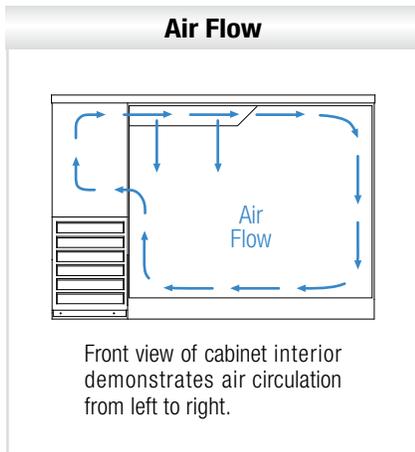

Equipped with 9 ft long NEMA 5-15P plug.

▲ **EBB48-24**

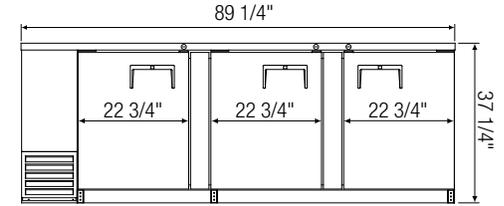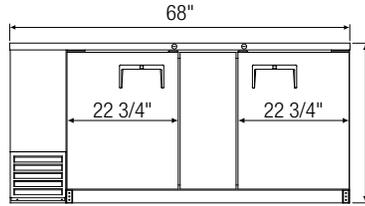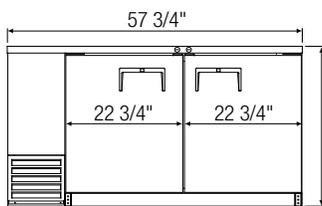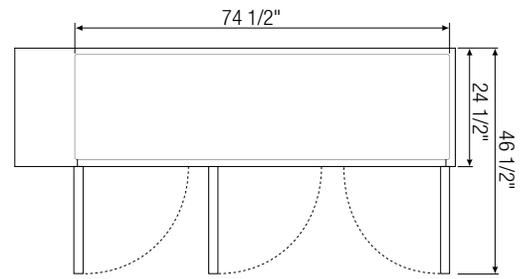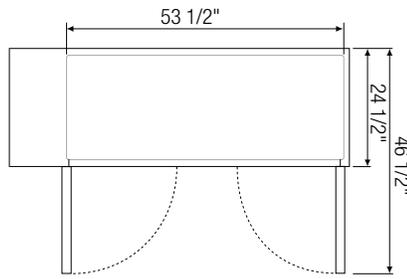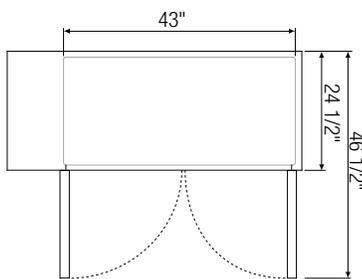

▲ **EBB59-24**

▲ **EBB69-24**

▲ **EBB90-24**

Model	Ref/ Frz/ Dual	# of Doors	# of Shelves	Capacity (Cu.Ft.)	HP	Refrigerant	Capacity		Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
							12 oz. Cans	12 oz. Bottles				L	D	H
EBB48-24	Ref	2	4	13.95	1/4+	R-134A	420	294	115-60-1	4.50	253	49	24 1/2	37 1/4
EBB59-24	Ref	2	4	16.86	1/4+	R-134A	560	357	115-60-1	4.50	280	57 3/4	24 1/2	37 1/4
EBB69-24	Ref	2	4	20.41	1/4+	R-134A	700	441	115-60-1	4.50	307	68	24 1/2	37 1/4
EBB90-24	Ref	3	6	27.96	1/3	R-134A	980	609	115-60-1	4.50	381	89 1/4	24 1/2	37 1/4

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity(▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.



Please visit our website for updated Energy Efficiency information.