

# BOTTOM MOUNT DEEP REACH-IN FREEZERS

Bottom Mounted Condensing Unit



**EVEREST**  
REFRIGERATION  
www.EVERESTref.com

## EB – Deep Series

• EBF1-D • EBNF2-D • EBF2-D



**EBF1-D**  
(Deep Series)



**EBNF2-D**  
(Deep Series)



**EBF2-D**  
(Deep Series)

### Cabinet Construction

Heavy duty stainless steel interior and exterior, with galvanized steel finished top, bottom and back wall of exterior. ABS evaporator drain cover. 2.5" thick high density foamed-in-place polyurethane insulation. Four 4" diameter casters (front casters with brakes). Door heater installed around inside cabinet frame to prevent moisture build-up.

### Refrigeration System

- Bottom mounted condensing unit
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with multiple evaporator fan motors providing balanced airflow throughout cabinet to ensure faster temperature drop
- Environmentally friendly CFC free R-404A refrigerant
- Adjustable, time initiated defrost cycle of 3 to 12 hours with 350 watt defrost heater, both time and temperature terminated for fail-safe operation
- Automatic evaporator fan motor delay after defrost cycle
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan with wicking pads for self sufficient condensation removal
- Pressure relief ports for rapid cabinet re-entry
- Interior airflow backguard to ensure proper air circulation
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

### Doors

- Heavy duty stainless steel interior and exterior
- 2.5" thick high density foamed-in-place polyurethane insulation
- Heavy duty adjustable torsion spring self-closing door system
- One piece snap-in magnetic door gaskets for easy replacement
- Heavy duty recessed door handles
- Door locks
- Field reversible doors

### Lighting

- Shielded incandescent interior lighting

### Shelving

- Three epoxy coated wire shelves per section
- Stainless steel pilasters and shelf clips

### Temperature Control

- Factory preset temperature, -4°F
- Temperature setting range from -10°F to 54°F
- Easy to read digital temperature display
- Easy to program push button temperature control
- Microchip digital control and monitoring system with a variety of functions to monitor and maintain optimum temperature



• Project / Customer \_\_\_\_\_  
• Item No. \_\_\_\_\_  
• Model No. \_\_\_\_\_



**Warranty**  
**5 Year — Compressor Warranty**  
**3 Year — Parts & Labor Warranty**  
Applicable to units purchased after July 1, 2014.



**Contact**  
201 W. Artesia Blvd, Compton, CA 90220  
T. (310) 323-6586, (800) 444-6285  
F. (310) 323-7524, (310) 761-1127

# BOTTOM MOUNT DEEP REACH-IN FREEZERS

Bottom Mounted Condensing Unit



**EVEREST**  
REFRIGERATION



www.EVERESTref.com

## EB – Deep Series


• EBF1-D • EBNF2-D • EBF2-D

### Dimensions



#### SIDE VIEW

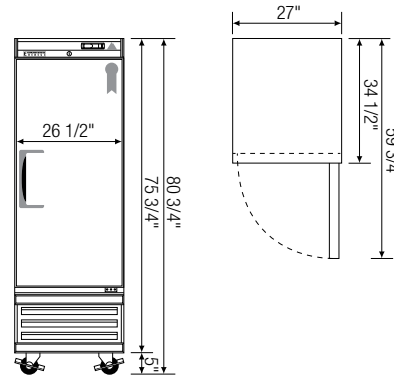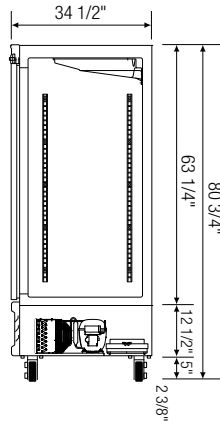

▲ EBF1-D  
(Deep Series)

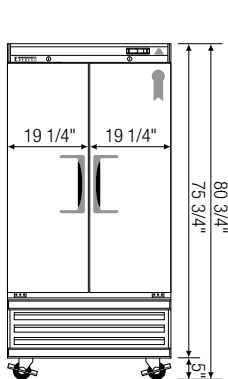

▲ EBNF2-D  
(Deep Series)

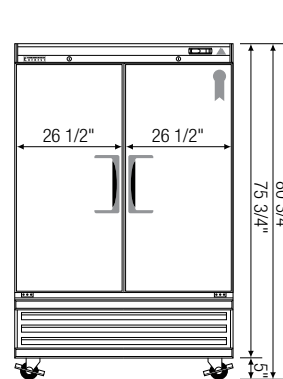

▲ EBF2-D  
(Deep Series)

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu.Ft.)	HP	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)			* Height does not include 5" for casters  Ref = Refrigerator Frz = Freezer Dual = Ref & Frz Combo
										L	D	H *	
EBF1-D	Frz	1	22	1/2+	R-404A	3	115-60-1	7.59	316	27	34 1/2	75 3/4	
EBNF2-D	Frz	2	37	3/4	R-404A	6	115-60-1	8.20	320	39 1/2	34 1/2	75 3/4	
EBF2-D	Frz	2	53	3/4+	R-404A	6	115-60-1	11.14	505	54 1/4	34 1/2	75 3/4	

**Disclaimer:** Product dimensions are for general purposes and not absolute value. Slight variations may exist. If dimensions are critical, please contact Everest.