





HOSHIZAKI

Series

KM1800SAH (3) 05/04
Item # 13110

KM-1800SAH(3) SERIES



KM-1800SAH Cuber
Shown on Optional
B-900 Bin

KM-1800SAH
Air-Cooled 1 Phase
KM-1800SAH3
Air-Cooled 3 Phase

ICEMAKER DIMENSION

Width x Depth x Height

KM-1800S_H

48 x 27^{3/8} x 36^{7/16}"

DIMENSION BYBIN SIZE

Width x Depth x Height

B-800

48 x 32^{1/2} x 82^{7/16}"

B-900

52 x 32^{1/2} x 82^{7/16}"

B-800 (2 stacked)

48 x 32^{1/2} x 118^{7/8}"

B-900 (2 stacked)

52 x 32^{1/2} x 118^{7/8}"

• Durable stainless steel exterior

• CycleSaver® design



• EverCheck® alert system



• Individual crescent cube

• Stainless steel evaporator

• Up to 1757 lbs. of ice production per 24 hours

• Stackable for 3514 lbs. per 24 hour Ice Production in the same floor space.

• Removable air filters



Reliability is a beautiful thing™

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA30269

1-800-438-6087

FAX 1-800-345-1325

TEL 770-487-2331

www.hoshizaki.com

STACKABLE ICE CUBER


KM-1800SAH(3) SERIES

DIMENSIONS (Inches) - CONNECTIONS

STACKABLE ICE CUBER

KM-1800SAH (AIR-COOLED / 1Ø)

KM-1800SAH3 (AIR-COOLED / 3Ø)



■ Up to 1757 lbs. of ice production per 24 hours

■ Stackable for 3514 lbs. per 24 hours



WARRANTY

THREEYEAR - Parts & Labor on entire machine.

FIVEYEAR - Parts & Labor on : Evaporator

FIVEYEAR - Parts on: Compressor, Air-Cooled Condenser Coil.

STAINLESS STEEL

INTERNAL EVAPORATOR

R-404 REFRIGERANT

SERVICE

Panels easily removed and all components accessible for service.

Removable/cleanable air filters.

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories.
Contact Factory for Warranty in other Countries.

STORAGE BINS

B-800 - 800 lb. Application Capacity (600 lb. ARI-Rated Capacity Bin)

B-900 - 900 lb. Application Capacity (660 lb. ARI-Rated Capacity Bin)

B-1200 - 1200 lb. Application Capacity

B-1500 - 1500 lb. Application Capacity

OPERATING LIMITS

Ambient Temp Range 45 - 100°F

Water Temp Range 45 - 90°F

Voltage Range 187-253V

Water Pressure 10 - 113 psig

ELECTRICAL & PLUMBING

208-230V/60/1 (3 wire with neutral for 115V)

30 amp Max Fuse - KM-1800SAH

208-230/60/3

20 amp Max Fuse - KM-1800SAH#

1/2" OD copper or equivalent independent

potable water supply

3/4" independent drain connection

AIR - COOLED

Water Temp° F.		50°	70°	90°
Air Temp° F.	70°	1756	1692	1589
	80°	1708	1609	1496
	90°	1692	1539	1428

AIR - COOLED




Water Temp° F.		50°	70°	90°
Air Temp° F.	70°	1757	1691	1597
	80°	1707	1604	1507
	90°	1691	1532	1434

UTILITY CONSUMPTION

Model Number	Ice Production Per Cycle		KWH per 100 lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal per 100 lbs.
	Lbs.	Cubes			
KM-1800SAH	42.9	2160	4.7	22.0	NA
KM-1800SAH3	42.9	2160	4.6	21.1	NA

SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KM-1800SAH	Air-Cooled	18.0	30	440 lbs.
KM-1800SAH3	Air-Cooled	11.0	20	440 lbs.

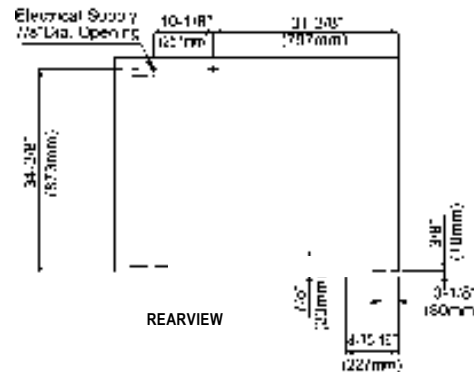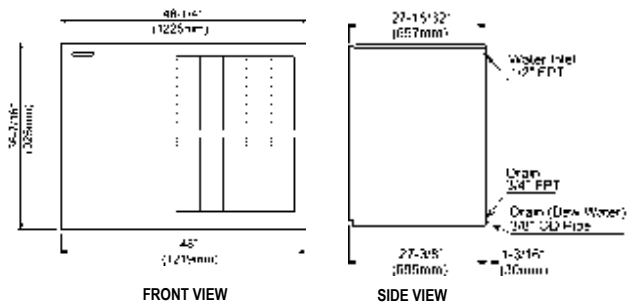

ICEDROPZONE

© HOSHIZAKI AMERICA, INC.

We reserve the right to change specifications without notice.

618 Hwy. 74 S., Peachtree City, GA30269

1-800-438-6087

FAX 1-800-345-1325

TEL 770-487-2331

www.hoshizaki.com

Printed in U.S.A.