



# ROYAL SERIES PLUMBING

## 8" CENTER WALL MOUNT FAUCETS

MODEL: \_\_\_\_\_ PROJECT: \_\_\_\_\_ ITEM #: \_\_\_\_\_ QTY: \_\_\_\_\_

### PRODUCT IMAGE



14-812 SHOWN

**ALSO AVAILABLE IN LOW LEAD BY  
ADDING "L" TO MODEL NUMBER**

### STANDARD FEATURES

- 1/4 turn high performance ceramic cartridge valve with built-in back flow preventers
- Heavy-Duty flanges with eccentric fittings for quick installations
- Heavy-Duty spout with double O-Ring construction and welded shoulder for durability
- High precision machining and polished nickel chromium finish
- Color-coded handles
- Optional wrist blade handles available
- Mounting kit included (1/2" NPT x 1 1/2" male nipples with locknuts)
- Full replacement parts available
- 1 Year Warranty
- **Low Lead Compliance**

"L" Models meet California AB-1953 and Vermont S152 standards  
(Faucet models already listed with the "L" suffix (i.e. 12-806L) are only available in Low Lead Compliant model)

### SPECIFICATIONS

- 8" on center wall mount with 1/2" NPT male inlets
- Rough in: Two 7/8" round holes on 8" centers
- Temperature Range: 40°F to 180°F
- Flow rate: 2 GPM max
- Shipping weight: 5 1/2 lbs.
- Quantity per case: 6



### APPROVED BY:

Due to our commitment to continued product improvement, specifications are subject to change without notice.

### CERTIFICATIONS:

Printed in the USA

**Krowne Metal Corporation**

100 Haul Rd. Wayne, NJ 07470 • Toll Free: (800) 631-0442 • Fax: (973) 872-1129  
sales@krowne.com • www.krowne.com • www.facebook.com/KrowneMetal • www.twitter.com/KrowneMetal

Rev. 05/2012  
No. 14-8XX



# ROYAL SERIES PLUMBING

## 8" CENTER WALL MOUNT FAUCETS

MODEL: \_\_\_\_\_ PROJECT: \_\_\_\_\_ ITEM #: \_\_\_\_\_ QTY: \_\_\_\_\_

### MODELS

#### STANDARD SPOUTS

| Model Numbers | Ⓐ   | Ⓑ                               | Ⓒ                               |
|---------------|-----|---------------------------------|---------------------------------|
| 14-806        | 6"  | 2 <sup>3</sup> / <sub>8</sub> " | 4 <sup>7</sup> / <sub>8</sub> " |
| 14-808        | 8"  | 2 <sup>3</sup> / <sub>8</sub> " | 4 <sup>7</sup> / <sub>8</sub> " |
| 14-810        | 10" | 2 <sup>5</sup> / <sub>8</sub> " | 5 <sup>1</sup> / <sub>4</sub> " |
| 14-812        | 12" | 3 <sup>1</sup> / <sub>8</sub> " | 5 <sup>5</sup> / <sub>8</sub> " |
| 14-814        | 14" | 3 <sup>1</sup> / <sub>2</sub> " | 6"                              |
| 14-816        | 16" | 4 <sup>1</sup> / <sub>2</sub> " | 7"                              |
| 12-818L*      | 18" | 5 <sup>1</sup> / <sub>2</sub> " | 8"                              |


NOTE: Add "L" to end of Model Number for Low Lead Model

\*Double Jointed Spout

#### GOOSENECK SPOUTS

| Model Numbers | Ⓓ                               | Ⓔ                               | Ⓕ                                |
|---------------|---------------------------------|---------------------------------|----------------------------------|
| 14-801L       | 6"                              | 6"                              | 10"                              |
| 14-802L       | 8 <sup>1</sup> / <sub>2</sub> " | 7 <sup>1</sup> / <sub>2</sub> " | 12 <sup>7</sup> / <sub>8</sub> " |

### DRAWING

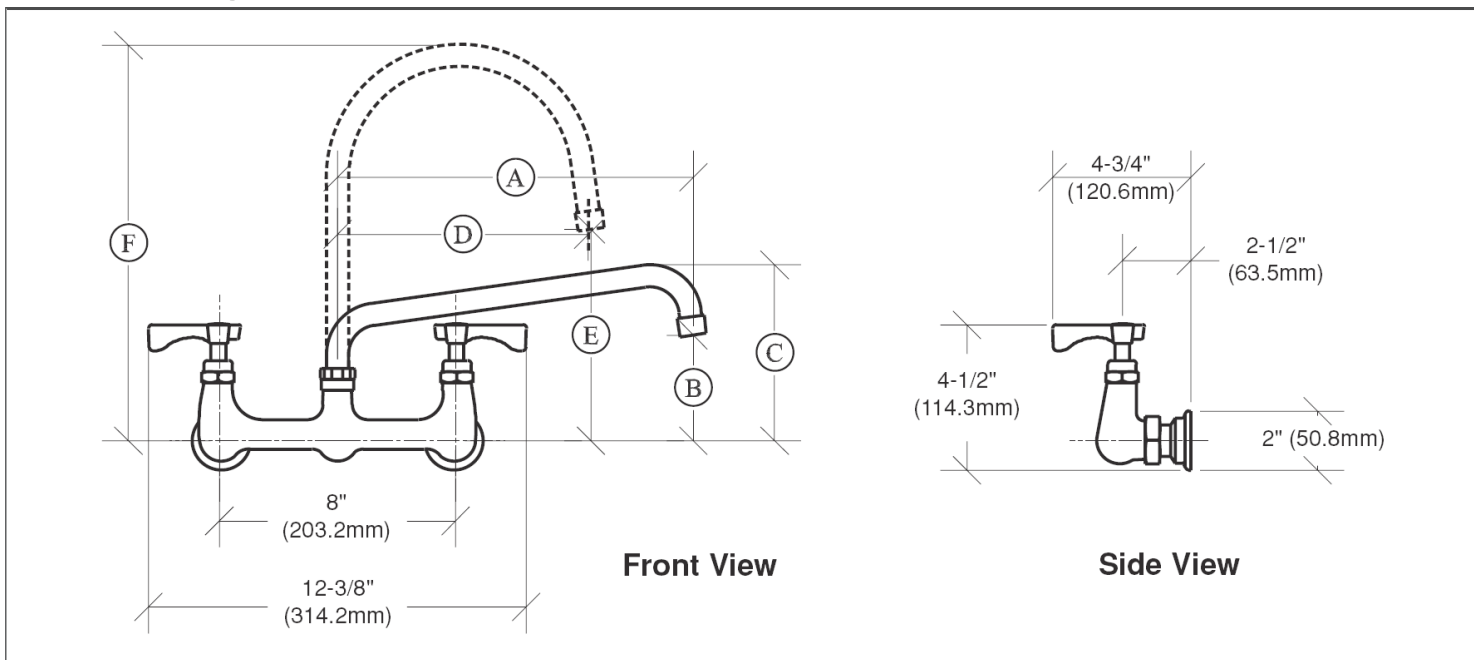

APPROVED BY:

CERTIFICATIONS:

Due to our commitment to continued product improvement, specifications are subject to change without notice.

Printed in the USA

**Krowne Metal Corporation**

100 Haul Rd. Wayne, NJ 07470 • Toll Free: (800) 631-0442 • Fax: (973) 872-1129

sales@krowne.com • www.krowne.com • www.facebook.com/KrowneMetal • www.twitter.com/KrowneMetal

Rev. 05/2012  
No. 14-8XX