

## WIRE SHELVING ACCESSORIES NSF

### Direct Wall Mounts

Each consists of one shelf support and mounting plate. Use single support at shelf ends; double support for adjoining shelves.  
(Single — Two required per shelf.)



**SINGLE**



**DOUBLE**

| Shelf Width<br>(in.) (mm) |     | Approx. Pkd. Wt.<br>(lbs.) (kg) |     | Model No.<br>Chrome | Model No.<br>Green Epoxy | Approx. Pkd. Wt.<br>(lbs.) (kg) |     | Model No.<br>Chrome | Model No.<br>Green Epoxy |
|---------------------------|-----|---------------------------------|-----|---------------------|--------------------------|---------------------------------|-----|---------------------|--------------------------|
| 14                        | 355 | 1.5                             | 0.7 | J1WD14C             | J1WD14K                  | 3                               | 1.4 | J2WD14C             | J2WD14K                  |
| 18                        | 457 | 2                               | 0.9 | J1WD18C             | J1WD18K                  | 4                               | 1.8 | J2WD18C             | J2WD18K                  |
| 24                        | 610 | 3                               | 1.4 | J1WD24C             | J1WD24K                  | 4.5                             | 2.0 | J2WD24C             | J2WD24K                  |

### Stem Casters — Resilient Rubber (Order By Each)

Use with posts to create a mobile shelving unit to meet your special needs. Each caster is constructed of resilient rubber wheels and plated components. Load rating is 200 lbs. (90kg) per caster. Sold by the piece.

| Wheel Diameter<br>(in.) (mm) | Face<br>(in.) (mm) | Load Rating<br>(lbs.) (kg) | Type   | Wheel Tread | Approx. Pkd. Wt.<br>(lbs.) (kg) | Model No.     |
|------------------------------|--------------------|----------------------------|--------|-------------|---------------------------------|---------------|
| 5                            | 127                | 1 1/4 32                   | 200 90 | Stem/Swivel | Resilient                       | 2 1/2 1.1 J5  |
| 5                            | 127                | 1 1/4 32                   | 200 90 | Stem/Brake  | Resilient                       | 2 5/8 1.2 J5B |



### Stem Caster Kit — High Modulus Rubber (One Kit = Four Casters)

Kit consists of four swivel casters with brakes. Each caster is constructed of durable, non-marking high modulus rubber. Load rating is 300 lbs. (136kg) per caster.

| Wheel Diameter<br>(in.) (mm) | Face<br>(in.) (mm) | Load Rating<br>(lbs.) (kg) | Type    | Wheel Tread | Approx. Pkd. Wt.<br>(lbs.) (kg) | Model No.     |
|------------------------------|--------------------|----------------------------|---------|-------------|---------------------------------|---------------|
| 5                            | 127                | 1 1/4 32                   | 300 136 | Stem/Brake  | Flat High Modulus Rubber        | 9 4.1 J5FBA-4 |



### Stackable Shelf Ledges

4" (100mm) High.

| Shelf Width<br>(in.) (mm) | Approx. Pkd. Wt.<br>(lbs.) (kg) | Model No.<br>Chrome |
|---------------------------|---------------------------------|---------------------|
| 14                        | 0.83 0.36                       | JL14-4C             |
| 18                        | 1.5 0.68                        | JL18-4C             |
| 24                        | 2 0.9                           | JL24-4C             |
| 30                        | 2.25 1.03                       | JL30-4C             |
| 36                        | 2.75 1.25                       | JL36-4C             |
| 48                        | 3.75 1.68                       | JL48-4C             |
| 60                        | 4 1.81                          | JL60-4C             |
| 72                        | 5 2.25                          | JL72-4C             |


**NOTE:** Actual ledge length is approximately 1" (25mm) shorter than nominal shelf length/width.



### Shelf Dividers for Shelves

Keep shelf contents orderly with these 8" (203mm) high, pressure-fit dividers.

| Shelf Width<br>(in.) (mm) | Approx. Pkd. Wt.<br>(lbs.) (kg) | Model No.<br>Chrome |
|---------------------------|---------------------------------|---------------------|
| 18                        | 2.25 1                          | JDD18C              |
| 24                        | 2.75 1.3                        | JDD24C              |

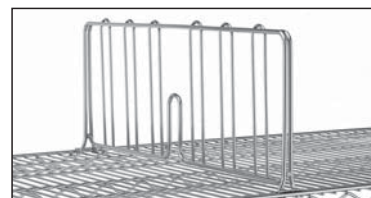

### Replacement Plastic Split Sleeves

One bag required per shelf; 4 pairs per bag.  
Model No. J9985



### "S" Hook

Two are required for each storage level.  
Model No. J9995Z



### Foot Plate

Use to bolt units to the floor, or when a broader, more stable foot is desired. Zinc Finish.  
Model No. J9993Z

