CHEF BASE REFRIGERATORS NATURAL

Self-Cleaning Condenser Equipped Units

■ Self-Cleaning Condenser (Patented)

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

■ Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

- Digital temperature display on front panel
- Strong body and durable construction Built with heavy duty 16 ga. stainless steel, Chef Base top is manufactured of one-piece reinforced stainless steel to ensure durability.

Countertops

PRCBE-36/48/60R-N supports up to 788 pounds of equipment. PRCBE-72/84/96R-N supports up to 1,192 pounds of equipment.

- Durable stainless steel drawers
- Top is insulated to eliminate heat transfer to the interior of cabinet
- Front breathing design for easy maintenance and zero-clearance installation


With compressors positioned on the side of the unit, our refrigerators can now be serviced without being moved. Our innovative, front breathing feature also allows this model to be highly efficient in narrow spaces.

■ High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

- Stainless steel top with drip guard (marine) edge
- Hot gas condensate system
- Full length drawer with gasket guard



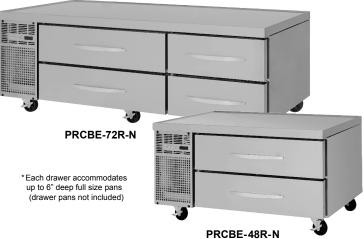

- Drawer slider load capacity up to 180 lbs
- Magnetic snap-in gasket
- Refrigerator holds 33°F ~ 38°F for the best in food preservation
- Standard features
- · Anti-corrosion coated evaporator
- Self-contained system
- 4" dia. swivel casters

Optional features

- · Legs available for all models: 6"
- · Casters available for all models: 1", 2.5", 5"
- Condensing unit on the right (lead time applies)

PRCBE MODELS SPECIFICATIONS

ELECTRICAL DATA	PRCBE-36R-N	PRCBE-48R-N	PRCBE-60R-N	PRCBE-72R-N	PRCBE-84R-N	PRCBE-96R-N
Voltage	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
Plug Type				(i) NEMA 5-15P		① NEMA 5-15P
Full Load Amp.	3.0	3.2	3.2	3.3	3.8	4.2
Compressor HP	1/4	1/4	1/4	1/4	3/8	3/8
Cord Length (ft.)	9	9	9	9	9	9
Refrigerant	R-290	R-290	R-290	R-290	R-290	R-290
DIMENSIONAL DATA	-					
Net Capacity (cu. ft.)	4.6	6.83	9.77	12.14	14.75	17.5
Ext. Dimension (L x D x H*) (in.)	36 x 331/2 x 215/8	48 x 331/2 x 215/8	60 x 331/2 x 215/8	72 x 331/2 x 215/8	84 x 331/2 x 215/8	96 x 331/2 x 215/8
# of Drawers	2	2	2	4	4	4
Pan Capacity (# of pans)†	Full size (2) 1/6 size (6)	Full size (4)	Full size (6)	Full size (6) 1/6 size (6)	Full size (8)	Full size (10)
Net Weight (lbs.)	248	277	317	407	461	551
Gross Weight (lbs.)	306	332	372	473	528	644

Design and specifications subject to change without notice. Most updated spec sheets are available at www.turboairinc.com.

Actual shipping weight may differ due to extra packing materials for product protection.

^{*} Height does not include 5" for caster height. † Drawer pan not included.