FRYERS



1ER85 SERIES FREE STANDING ELECTRIC FRYERS



Model 1ER85C Shown with caster accessory







SPECIFICATIONS

Electric deep fat fryer, Vulcan Model No. (1ER85A) (1ER85D) (1ER85C). Temperature controls are adjustable from 200° to 390°F and include 3 melt cycle and high limit control. Stainless steel cabinet with four 6" adjustable legs. 16 gauge stainless steel fry tank holds 85 lbs. of frying compound. 11/4" full port ball type drain valve. 24 kW low watt density ribbon style heating elements. Twin fry baskets. Power supply is 208 volt, 50/60 Hz, 3 phase.

Overall Dimensions:

21"w x $34\frac{3}{8}$ "d x $39\frac{7}{16}$ "h working height is $35\frac{3}{4}$ "

NSF listed. CSA design certified.

Specify voltage when ordering.

1ER85A	Solid state analog knob controls.
1ER85D	Solid state digital controls.
1ER85C	Programmable computer controls.

STANDARD FEATURES

- Stainless steel front and sides.
- Four 6" adjustable legs.
- 16 gauge stainless steel fry tank, 85 lb. capacity.
- Ten year limited fry tank warranty.
- 1¼" full port ball type drain valve.
- 24 kW low watt density ribbon style heating elements.
- Multiple fat melt modes.
- High limit control.
- Twin fry baskets with plastic coated handles.
- One year limited parts and labor warranty.

CONTROLS

- **1ER85A** Solid state analog knob control. Accurate temperature control 200°F to 390°F within +/- 2°. Multiple fat melt modes, fast recovery.
- **1ER85D** Solid state digital read temperature control. Accurate temperature control 200°F to 390°F within +/- 2°. Multiple fat melt modes, fast recovery, boil out mode and two countdown timers.
- 1ER85C Computer control digital read temperature control. Accurate temperature control 200°F to 390°F within +/- 2°. Multiple fat melt modes, fast recovery and boil out mode. Ten programmable product key sand ten countdown timers. Secondary and advanced programming options.

OPTIONAL FEATURES (Factory Installed)

- 480 volt, 3 phase. (Separate 120 volt, 20 amp electric supply required.)
- ☐ Second year extended limited parts and labor warranty

ACCESSORIES (Packaged & Sold Separately)

- ☐ Stainless steel tank cover doubles as a work surface top
- ☐ Set of four 6" adjustable casters (2 locking).
- ☐ Extra set of twin fry baskets 91/4"w x 151/4"d x 6"h
- □ Large single fry basket $18\frac{3}{4}$ "w x $15\frac{1}{4}$ "d x 6"h
- ☐ Tri-Baskets 6½ "w x 13¼ "d x 6"h
- ☐ Frymate[™] VX21S dump station
- ☐ Connecting Kit(s) connect two fryers together (banking strip, brackets and hardware)
- ☐ 10" high stainless steel removable splash guard



a division of ITW Food Equipment Group LLC

P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602



1ER85 SERIES FREE STANDING ELECTRIC FRYERS


INSTALLATION INSTRUCTIONS

- An adequate ventilation system is required for Commercial Cooking Equipment. Information may be obtained by writing to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02269. When writing refer to NFPA No. 96.
- All models require a 6" clearance at both sides and rear adjacent to combustible construction.
- 3. All models require a 16" (407 mm) minimum clearance to adjacent open top burner units.
- 4. This appliance is manufactured for commercial installation only and is not intended for home use.

SERVICE CONNECTIONS:

(E) NEMA 5-15P, 120 volt, 60 Hz, 1 phase electrical connection required for 480 volt fryers. Not supplied with fryer.

NOTE: In line with its policy to continually improve its product, Vulcan reserves the right to change materials and specifications without notice.

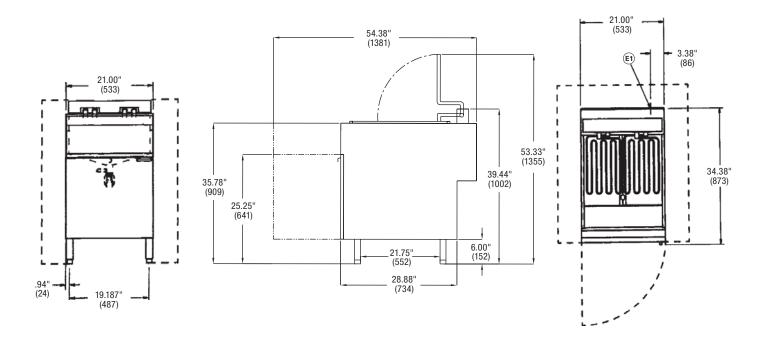

ELECTRICAL CHARACTERISTICS												
	MODEL NUMBER	TOTAL KW CONNECTION	3 PH LOADING KW PER PHASE		NOMINAL AMPS PER LINE WIRE							
					3 PHASE							
			208 VOLT	480 VOLT	208 VOLT			480 VOLT				
			X-Y	X-Z	Х	Υ	Z	Х	Υ	Z		
	1ER85	24	8	8	67	67	67	29	29	29		

This appliance is manufactured for commercial use only and is not intended for home use.



a division of ITW Food Equipment Group LLC

P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602