HEATED HOLDING

VULCAN



Model CBFT



SPECIFICATIONS

Vulcan Models CBFT and CBFTHS stainless steel cabinets with welded double pan construction. Support channels welded at base, integral dual layer fully welded corner posts. Continuous wraparound aluminum (dove-tail) designed bumper complete with (secure fit) non-marking vinyl insert. Double pan fully insulated door, 270 degree swing, 12 gauge hinges, recessed door pulls. Top mounted forced air heat, with rear mounted "tunnel" distribution system. Electronic thermostat/thermometer equipped with Lexan[™] cover, lighted on/off switch. Super duty 5" polyurethane casters mounted to 1/4" mounting plates. (2) swivel casters with brakes, (2) rigid casters equipped with mounting plate secured to reinforced base channel with 3/8" bolts. All fasteners are tamper-proof, hinges and transport latches are 12 ga. and fully welded to the cabinet. Fully welded one piece shelving is removable for cleaning. Model CBFT holds twelve 18" x 26" x 1" bun pans or twenty-four 12" x 20" x 4" hotel pans. Model CBFTHS holds six 18" x 26" x 1" bun pans or twelve 12" x 20" x 4" hotel pans. One year limited parts and labor warranty. After the first year, lifetime parts warranty on the heating elements.

CBFT SERIES HOLDING & TRANSPORT CABINET

Item #

- □ **CBFT** Holding & Transport Cabinet
- CBFTHS Holding & Transport Cabinet

STANDARD FEATURES

- 12 gauge lockable transport latch.
- Tamper-proof fasteners throughout.
- Top mounted forced air heating system.
- Fully insulated.
- Fully welded removable tray slides.
- Adjustable thermostat/thermometer with security cover.
- Security cover has Lexan[™] viewing port.
- Flush recessed door pull.
- Heavy duty 5" casters.
- Magnetic door closure.
- All stainless steel structural components.
- Fully welded.
- Integral dual layer fully welded corner posts.
- Super duty reinforced base.
- 270 degree door swing.
- Full perimeter bumper.
- One year limited parts and labor warranty. After the first year, lifetime parts warranty on the heating elements.
- (3) Fully welded 12 gauge hinges.
- Face mounted "sure seal gasket".


OPTIONS

- Ambient configuration
- No racking (stacked trays)



VULCAN

CBFT SERIES HOLDING & TRANSPORT CABINET

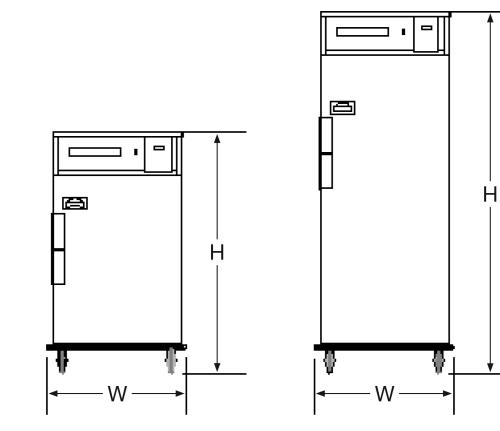

MODEL	DIMENSIONS	CAPACITY	ELECTRICAL		NEMA	SHIPPING WEIGHTS	
	EXTERIOR	CAPACITY	VOLTS	WATTS	INCIVIA	LBS	KG
CBFT	28" W x 34½" D x 72" H	12 bun 24 (4" bulk)	120	1,000	115v 8' 5-15P	525	238
CBFTHS	28" W x 34½" D x 45" H	6 bun 12 (4" bulk)	120	1,000	115v 8' 5-15P	375	170



P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602

NOTE: In line with its policy to continually improve its products, Vulcan reserves the right to change materials and specifications without notice.