


# THERMOMETERS

**NSF** TMT-SERIES  
as indicated



TMT-HH1

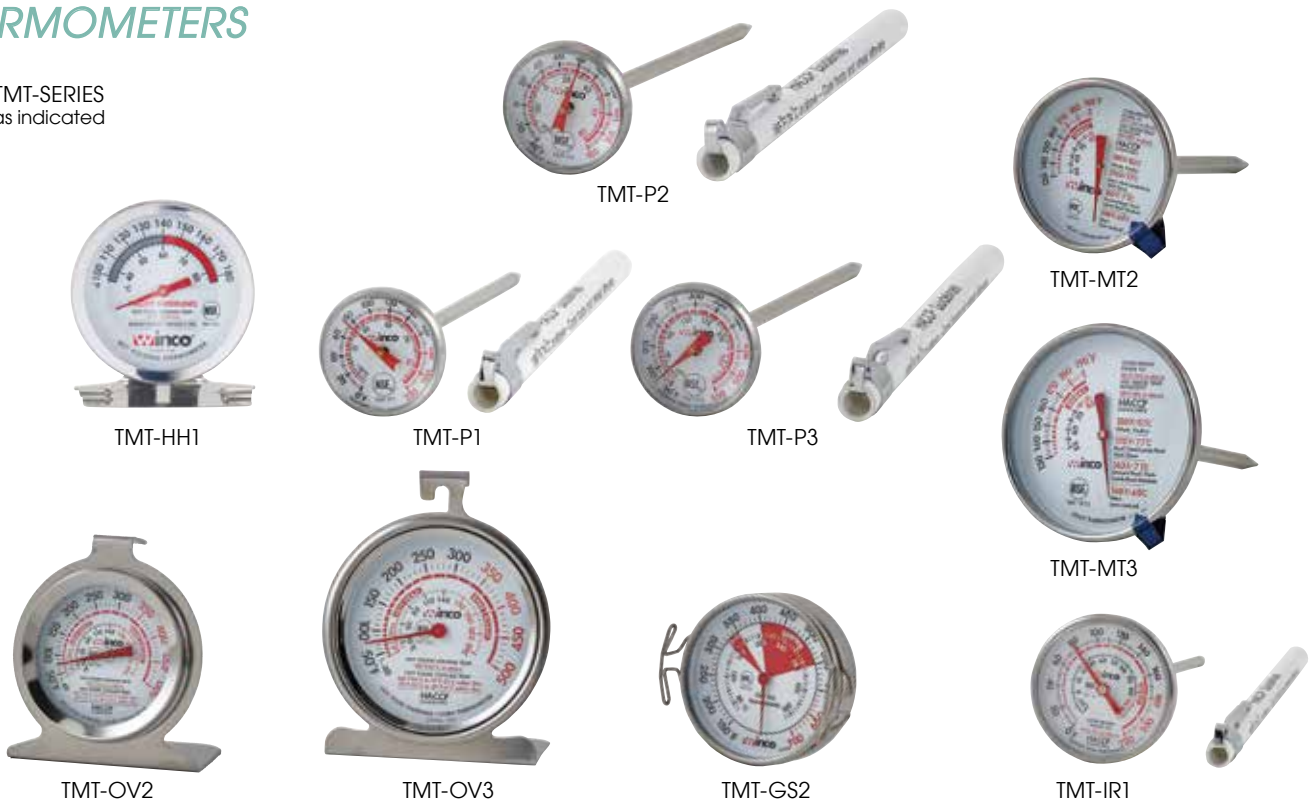

TMT-P2



TMT-MT2



TMT-P1



TMT-P3



TMT-MT3



TMT-OV2



TMT-OV3



TMT-GS2



TMT-IR1

## HOT HOLDING

◆ Hang or stand-alone

ITEM	NSF	TEMPERATURE RANGE	DIAL FACE	GUIDELINE ON DIAL	UOM	CASE
TMT-HH1		100° - 180°F; 38° - 82°C	2" Dia	HACCP	Each	12/96

## POCKET TEST

◆ Includes protective sleeve with built-in clip  
◆ Calibrate for accuracy

ITEM	NSF	TEMPERATURE RANGE	DIAL FACE	PROBE	GUIDELINE ON DIAL	UOM	CASE
TMT-P1		0 - 220°F; -18 - 104°C	1" Dia	5"L	HACCP	Each	12/72
TMT-P2		-40 - 180°F; -40 - 80°C	1" Dia	5"L	HACCP	Each	12/72
TMT-P3		50 - 550°F; 10 - 288°C	1" Dia	5"L	HACCP	Each	12/144

## MEAT

◆ Hand held with adjustable indicator

ITEM	NSF	TEMPERATURE RANGE	DIAL FACE	PROBE	GUIDELINE ON DIAL	UOM	CASE
TMT-MT2		130 - 190°F; 55 - 85°C	2" Dia	5"L	HACCP	Each	12/144
TMT-MT3		130 - 190°F; 55 - 85°C	3" Dia	5"L	HACCP	Each	12/72

## OVEN

◆ Hanging hook and standing panel are built-in

ITEM	NSF	TEMPERATURE RANGE	DIAL FACE	GUIDELINE ON DIAL	UOM	CASE
TMT-OV2		40 - 500°F; 10 - 260°C	2" Dia	HACCP	Each	12/144
TMT-OV3		40 - 500°F; 10 - 260°C	3" Dia	HACCP	Each	12/144

## GRILL FACE

◆ Flat surface for grill-top

ITEM	NSF	TEMPERATURE RANGE	DIAL FACE	UOM	CASE
TMT-GS2		150 - 700°F; 70 - 370°C	2" Dia	Each	3/144

## INSTANT READ

◆ Includes protective sleeve with built-in clip  
◆ Calibratable for accuracy

ITEM	NSF	TEMPERATURE RANGE	DIAL FACE	PROBE	GUIDELINE ON DIAL	UOM	CASE
TMT-IR1		0 - 220°F; -18 - 104°C	1-3/4" Dia	5"L	HACCP	Each	12/72

# THERMOMETERS

TMT-SERIES  
as indicated



TMT-CDF4



TMT-FT1




TMT-IO1



TMT-CDF5



TMT-CDF3



TMT-CDF2



TMT-RF4



TMT-RF3



TMT-RF2



TMT-RF1

## FROTHING

- ◆ Includes pot clip
- ◆ Calibrate for accuracy

ITEM	NSF	TEMPERATURE RANGE	DIAL FACE	PROBE	OC AVAILABLE	UOM	CASE
TMT-FT1		0-220°F -18-104°C	1" Dia	5"L	Optional	Each	12/144

## CANDY/DEEP FRYER

- ◆ Includes pot clip
- ◆ Calibrate for accuracy

ITEM	NSF	TEMPERATURE RANGE	DIAL FACE	PROBE	GUIDELINE ON DIAL	OTHER FEATURES	UOM	CASE
TMT-CDF2		100-400°F; 40-200°C	2" Dia	6"L	HACCP	• Adjustable Indicator • Calibratable	Each	12/144
TMT-CDF3		100-400°F; 40-200°C	2" Dia	12"L	HACCP	• Adjustable Indicator • Calibratable	Each	12/144
TMT-CDF4	N/A	100-400°F; 40-200°C	2" x 11-3/4"	N/A	N/A	• Top Hanging • Vertical Read	Each	12/72
TMT-CDF5		100-500°F; 40-260°C	3" Dia	12"L	HACCP	• Adjustable Indicator • Calibratable	Each	6/36

## REFRIGERATOR/FREEZER

ITEM	NSF	TEMPERATURE RANGE	DIAL FACE	GUIDELINE ON DIAL	MOUNTING	UOM	CASE
TMT-RF1		-26-86°F; -30-30°C	2-7/8" x 5/8"	N/A	Suction Cup Included	Pack	12/144
TMT-RF2		-20-70°F; -30-21°C	2" Dia	HACCP	Built-in Hanging Hook & Standing Panel	Each	12/72
TMT-RF3		-20-70°F; -30-21°C	3" Dia	HACCP	Built-in Hanging Hook & Standing Panel	Each	12/72
TMT-RF4		-20-80°F; -28-26°C	3-1/2" x 1-1/8"	HACCP	Suction Cup Included	Each	12/72

## INDOOR / OUTDOOR

- ◆ Weather resistant, rust proof
- ◆ Install with hanging hook or double-sided adhesive (included)

ITEM	NSF	TEMPERATURE RANGE	DIAL FACE	UOM	CASE
TMT-IO1	N/A	-40° - 120°F; -40° - 50°C	1-3/4" Dia	Each	12/144

