

Glass Door Merchandisers

EM Series

Reference Model: EMGR69B

Maximizing product visibility and accessibility, the Glass Merchandiser series feature clear, low emissivity, self-closing glass doors that reflect UV rays and provide excellent insulation and energy efficiency. Vivid LED lighting enhances the appeal of displayed items for increased high impulse sales.

● Exterior ○ Interior

1: Digital Control

Multi-function with easy to read LED display.



2: Double Pane Glass

Low emissivity and UV reflective to help regulate cabinet temperature.

3: Self-Closing Mechanism

Angled tracks allow sliding glass doors to close automatically

4: Sliding Door Gasket

Slide-in and magnetized for ease of cleaning and replacement.

5: Heavy Duty Door Bumper

Provides impact absorption to sliding glass doors.

6: Epoxy Coated Shelves

Durable, steel wire shelves with built-in airflow guards.

7: Adjustable Screw Legs

Optional 5" or 3" swivel caster or height-adjustable leg replacements also available.



Blizzard R290 Condensing Unit*

Bottom mounted, self-contained, fully detachable and uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.

Audible Overheat Protection Alarm*

Keeps compressor and condenser coil from overheating.

Self-Maintaining Condensate Pan


Energy efficient and requires no external drains or electric heaters.

ECM Evaporator Fan Motor*

Electronically Commutated. Achieves rapid cooling with less energy.

ECM Condenser Fan Motor*

Reversible and Electronically Commutated. Cools down compressor and supports condenser coil cleaning.

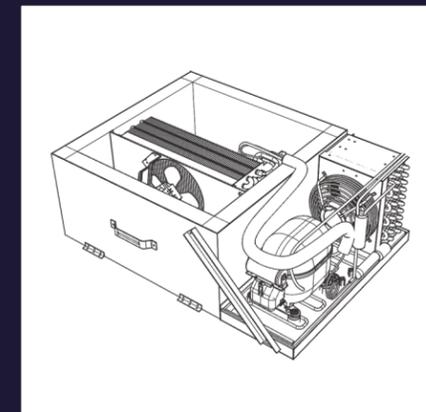

8: Full Length Air Duct*

Ensures optimal distribution of cold air.

9: Energy Efficient LED

Provides bright, high color illumination at lower heat output. Equipped with on/off switch

10: Detachable Drain Plug



Removes for ease of cleaning.

11: Rubber and Fiber Strip Gaskets

Provides additional temperature and moisture protection for sliding doors.

12: Thick Insulation

2.5" thick high density polyurethane insulation ensures temperature stability and conserves energy.



* Applies to select models.